


Specification Sheet for SMD 5050 Double-Line LED Flexible Strips



Applications:


- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting

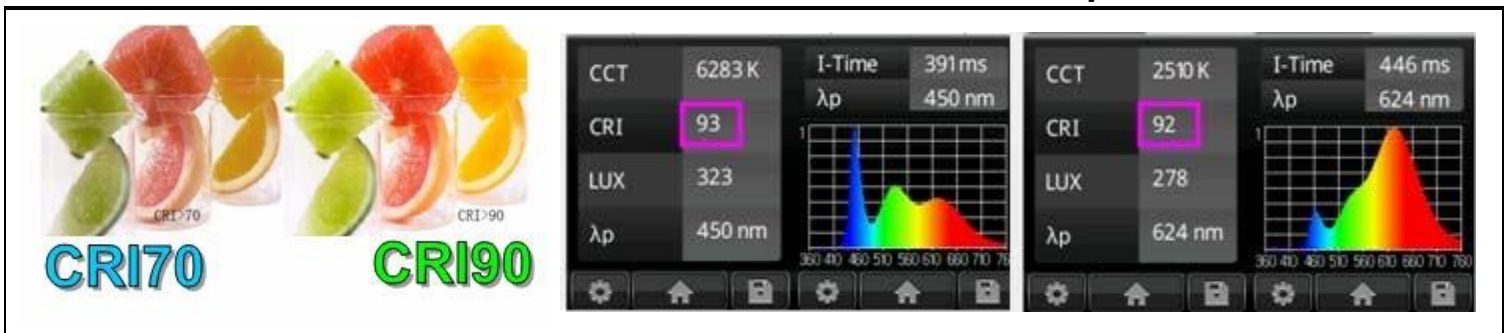

Product features:


- ◆ Various angle 120degrees
- ◆ With self-adhesive tape on backside, 6LEDs a group for DC24V
- ◆ Made of high quality LEDs
- ◆ Work Voltage: 24V
- ◆ UL, CUL, CE, ROHS Approved

Dimensions (Single Color)

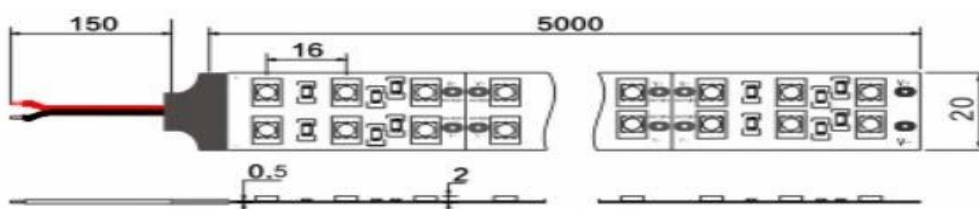

Unit:mm

Dimensions (RGB Color)

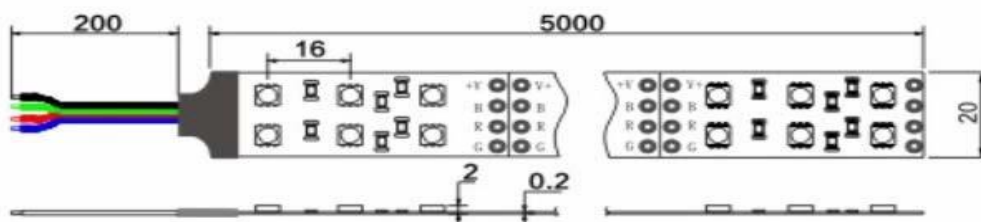

Unit:mm


Model No.	Color	LED Qty	λ (Nm)/(CT:K)	Luminous Flux(lm)	PCB Size mm	Work Voltage	Power	Water proof	Packing
CRI ≥ 90 Version									
F5050A60SA-P-24	□ Pure White	120/m	6000-7000K	2300-2500	20mm	DC24V	28.8W/m	IP20	Reel/5m
F5050A60SA-N-24	□ Warm White		4000-4500K	2100-2300					
F5050A60SA-W-24	□ Warm White		2500-3500K	1900-2100					

Model No.	Color	LED Qty	λ (Nm)/(CT:K)	Luminous Flux(lm)	PCB Size mm	Work Voltage	Power	Water proof	Packing
Normal CRI Version									
F5050A60-P-24	□ Pure White	120/m	6000-7000K	2300-2500	20mm	DC24V	28.8W/m	IP20	Reel/5m
F5050A60-N-24	□ Warm White		4000-4500K	2100-2300					
F5050A60-W-24	□ Warm White		2200-3500K	1900-2100					
F5050A60-R-24	■ Red		620-630	860-900					
F5050A60-Y-24	■ Yellow		585-595	860-900					
F5050A60-B-24	■ Blue		455-470	600-650					
F5050A60-G-24	■ Green		510-525	1680-1720					
F5050A60-C-24	■ ■ ■ RGB		620-630 510-525 455-470	280-300 600-680 200-210					

Connection drawings (Single Color)



Connection drawings (RGB)

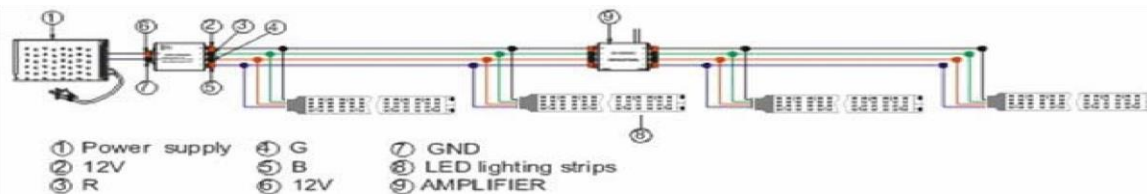

Notice:

Before application, please make sure the power supply is in accordance to the strips