

Accent Design Concepts



Accent Design Concepts

TABLE OF CONTENTS



EXIT SIGNS

- 02 / 22



EMERGENCY LIGHT

- 02 / 22



EXIT AND EMERGENCY COMBO


- 02 / 22

Accent Design Concepts



EXIT SIGNS

UL NUMBER: E472028

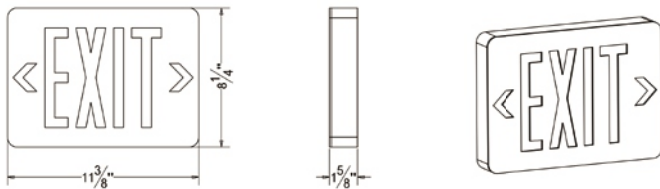

ITEM NO.: EXL001

A	B	C	D	E	F	G
A Series				E Housing Color		
EXL001	Exit sign			W	White	
				B	Black	
B Input Volt				F Letter Color		
	120V			R	Red	
277	277V			G	Green	
U	120-277V					
C Face				G Arrow		
S	Single			N	No	
D	Double			L	Left	
				R	Right	
D	Battery			Q	Left and right	
Battery backup						
AC	AC only					

Fixture

- Engineering Grade Thermoplastic Material, ABS housing
- UL 94V-0 flame rating
- 90 Minute Minimum Emergency Mode
- Innovative, snap-together design allows for fast installation
- Mounting Hardware Included
- Replaceable directional chevron inserts are easily removed and reinserted.
- Single or double face configuration
- Removable directional indicators
- Removable front cover for easy installation and battery maintenance
- Letters 6" height with 3/4" stroke
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- Low energy consumption-only 2.0 watts at 120V

Light Source

- LEDs mounted on print circuit board.
- LED lamps are operating in normal (AC input) and emergency (DC input) modes.

Battery


- AC only, No battery backup
- Backup circuit provided for external emergency power source

Mounting

- Universal (wall, side or ceiling) mounting canopy
- Secured through a locking clip on the inside

EXIT SIGNS

UL NUMBER: E472028

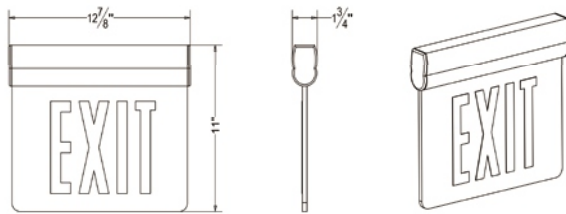

ITEM NO.:EXL002

A	B	C	D	E	F	G
A	Series			E	Letter Color	
EXL002	Exit sign			R	Red	
				G	Green	
B	Input Volt			F	Arrow	
277	120V			N	No	
U	277V			L	Left	
	120-277V			R	Right	
C	Face			Q	Left and right	
S	Single			G	Mounting	
D	Double			E	End Mount	
D	Battery			W	Wall Mount	
	Battery backup			C	Ceiling Mount	
AC	AC only			R	Recessed Mount	

Fixture

- Rigid aluminum housing
- Etched, clear acrylic edge-lite replaceable panel (content can be changed as per customer's design)
- Letter 6" height with 3/4" stroke
- Single or double face configuration
- Removable directional indicators
- Removable front cover for easy installation and battery maintenance
- 90 Minute Minimum Emergency Mode
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- Momentary test switch and LED AC-On indicator light
- Close Tolerance Electric Circuit, Short circuit proof

Light Source

- A soft and even glow radiates as illumination is provided through the use of the most cutting edge LED technology
- LED lamps are operating in normal (AC input) and emergency (DC input) modes

Battery



- AC only, No battery backup
- Backup circuit provided for external emergency power source
- 24 hours recharge after 90 minutes discharge

Mounting

- Universal mounting canopy, allowing for end, wall, or ceiling mounts.
- Ceiling recessed mounting is also available

EXIT SIGNS

UL NUMBER: E472028

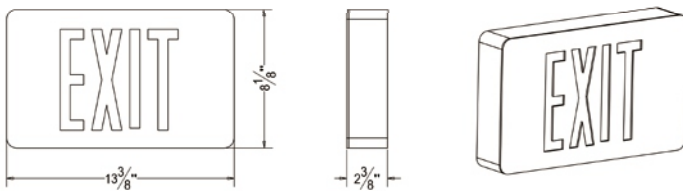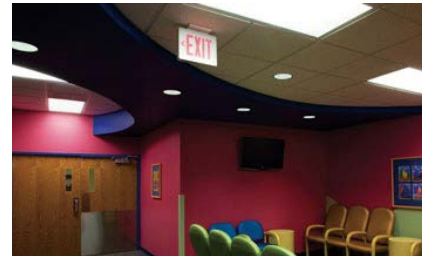

ITEM NO.:EXL003

A	B	C	D	E	F
A Series		E Housing Color			
EXL003	Exit sign	W White		B Black	
B Input Volt		F Letter Color			
277	120V	R Red		G Green	
U	277V				
	120-277V				
C Face					
S	Single				
D	Double				
D Battery					
Battery backup					
AC	AC only				

Fixture

- Super Slim, compact Profile
- Premium Die Cast Aluminum Material
- Innovative, snap-together design allows for fast installation
- Mounting Hardware Included
- Snap-out knockouts and chevron directional arrows.
- Removable directional indicators
- Letters 6" height with 3/4" stroke
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- LED indicator light and push button test switch.

Light Source

- LEDs mounted on print circuit board.
- LED lamps are operating in normal (AC input) and emergency (DC input) modes.

Battery


- AC only, No battery backup
- Backup circuit provided for external emergency power source
- 24 hours recharge after 90 minutes discharge.

Mounting

- Universal (wall, side or ceiling) mounting
- Universal knockouts on back plate allow for wall mounting directly to standard J-Box.

EXIT SIGNS

UL NUMBER: E472028

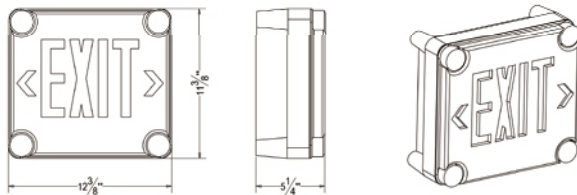

ITEM NO.:EXL005

A	B	C	D	E
A Series		D Housing Color		
EXL005	Exit sign	W White		B Black
B Input Volt		E Letter Color		
277	120V	R Red		G Green
U	277V			
	120-277V			
C Battery				
AC		Battery backup		
		AC only		

Fixture

- Fully gasketed polycarbonate lens and ABS thermoplastic housing.
- Innovative design allows for fast installation.
- Knockout directional chevrons.
- Letters 6" height with 3/4" stroke
- Single face configuration only
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- Low energy consumption-only 2.5 watts at 120V
- LED indicator light and push button test switch.

Light Source

- LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- Optional 6V SEALED BEAM lamp heads

Battery



- AC only, No battery backup
- Battery backup, 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection- Preventing deep discharge damage to the battery.

Mounting

- Wall, ceiling or end mounting configurations are available.

EXIT SIGNS

UL NUMBER: E472028

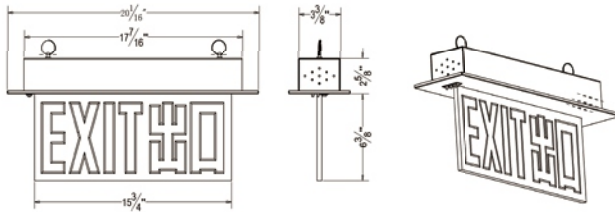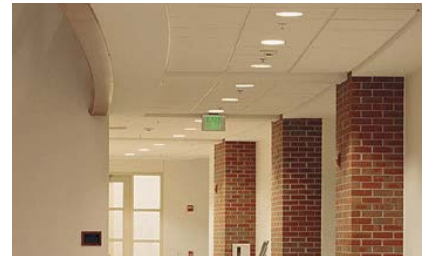

ITEM NO.:EXL009

A	B	C	D	E
A	Series		D	Battery
EXL009	Exit sign		AC	Battery backup AC only No battery
B	Input Volt		E	Letter Color
277	120V		R	Red
U	277V		G	Green
	120-277V			
C	Face			
S	Single			
D	Double			

Description

- Universal Single or Double Face
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- Etched, clear acrylic edge-lite face plate
- Universally Surface Mounted, Recessed Mounted Pendant Mounted All Are Available
- Red or Green Letter Colors

Electrical

- Dual Voltage Input 110-277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

Lamp Date


- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination'
- 2.5W, AC
- DC: LED Lamps
- 3W 3.6VDC

Warranty

- EXIT: 2-Year
- Battery: 15 Year Pro-rata

EXIT SIGNS

UL NUMBER: E472028

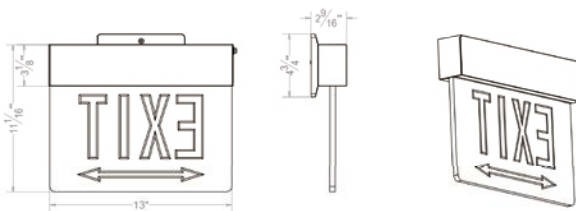

ITEM NO.:EXL010

A	B	C	D	E	F
A	Series			E	Letter Color
EXL010	Exit sign			R	Red
				G	Green
B	Input Volt			F	Arrow
	120V			N	No
277	277V			L	Left
U	120-277V			R	Right
C	Face			LR	Double
S	Single				
D	Double				
D	Battery				
	Battery backup				
AC	AC only				

Description

- Universal Single or Double Face
- Energy Saving LED Lamps
- Aluminum Housing
- Clear Acrylic Face Plate
- Direction of Narrow Can Be Done As Customers' Needs
- Universally Surface Mounted, Ceiling, Wall or End
- Universal J-box Mounting Pattern
- Red or Green Letter Colors
- Die-cast Canopy Provided

Electrical

- Dual Voltage Input 110-277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Lamp Date



- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, Input: 4.2W, Output: 0.7W, 90 Minutes Emergency Time 0.045A, LM>50
- 277V, Input: 4.2W, Output: 0.7W, 90 Minutes Emergency Time 0.019A, LM>50
- DC: LED Lamps

Warranty

- EXIT: 2-Year
- Battery: 15 Year Pro-rata

EXIT SIGNS

UL NUMBER: E472028

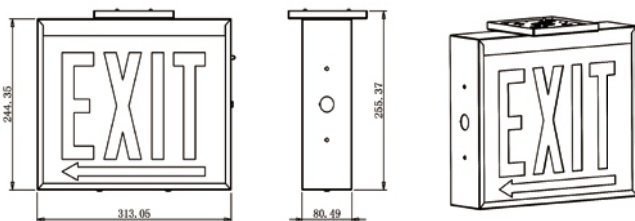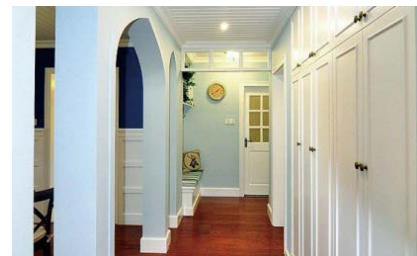

ITEM NO.:EXL011

A	B	C	D	E	F
A	Series			E	Letter Color
EXL011	Exit sign			R	Red
				G	Green
B	Input Volt			F	Arrow
277	120V			N	No
U	277V			L	Left
	120-277V			R	Right
C	Face			LR	Double
S	Single				
D	Double				
D	Battery				
AC	Battery backup				
	AC only				

Description

- Universal Single or Double Face
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- Other State Styles Are Also Available
- Universally Surface Mounted, Ceiling ,Wall or End
- Universal J-box Mounting Pattern
- Red or Green Letter Colors

Electrical

- Dual Voltage Input 120/277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Lamp Date


- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, Input: 7W, Output: 1.8W, 90 Minutes Emergency Time, 0.077A, LM>50
- 277V, Input: 7W, Output: 1.8W, 90 Minutes Emergency Time, 0.033A, LM>50
- DC: LED Lamps

Warranty

- EXIT: 2-Year
- Battery: 15 Year Pro-rata

EXIT SIGNS

UL NUMBER: E472028

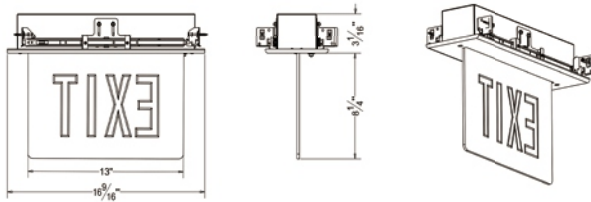

Fixture

- Universal Single or Double Face
- Energy Saving LED Lamps
- Aluminum Housing
- Clear Acrylic Face Plate
- Direction of Narrow Can Be Done As Customers' Needs
- Recessed Mounted
- Universal J-box Mounting Pattern
- Red or Green Letter Colors

Electrical

- Dual Voltage Input 110-277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

ITEM NO.:EXL012

A	B	C	D	E	F
A	Series			E	Letter Color
EXL012	Exit sign			R	Red
				G	Green
B	Input Volt			F	Arrow
	120V			N	No
277	277V			L	Left
U	120-277V			R	Right
C	Face			LR	Double
S	Single				
D	Double				
D	Battery				
	Battery backup				
AC	AC only				

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Lamp Date


- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, Input:4.2W, Output:0.7W, 90 Minutes Emergency Time, 0.045A, LM>50
- 277V, Input:4.2W, Output:0.7W, 90 Minutes Emergency Time,0.019A, LM>50
- DC: LED Lamps

Warranty

- EXIT: 2-Year
- Battery: 15 Year Pro-rata

EXIT SIGNS

UL NUMBER: E472028

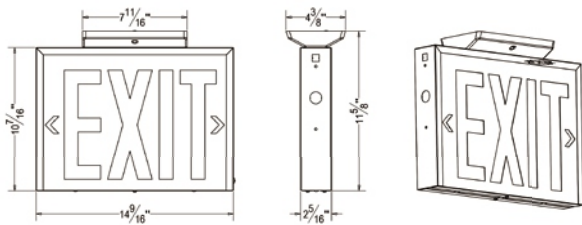

Fixture

- Universal Single or Double Face
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- Other State Styles Are Also Available
- Universally Surface Mounted, Ceiling, Wall or End
- Universal J-box Mounting Pattern
- Red or Green Letter Colors

Electrical

- Dual Voltage Input 120/277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

ITEM NO.:EXL013

A	B	C	D	E
A	Series		D	Battery
EXL013	Exit sign		AC	Battery backup AC only
B	Input Volt		E	Letter Color
277	120V		R	Red
U	277V		G	Green
	120-277V			
C	Face			
S	Single			
D	Double			

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Lamp Date

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, 5W, 90 Minutes Emergency Time, 0.041A
- 277V, 5W, 90 Minutes Emergency Time, 0.018A
- DC: LED Lamps

Warranty

- EXIT: 2-Year
- Battery: 15 Year Pro-rata

EXIT SIGNS

UL NUMBER: E472028



EXL010-DN



EXL010-DL



EXL010-DR



EXL010-DL1



EXL010-DLR1



EXL010-DR1



EXL010-DD1



EXL010-DL2



EXL010-DLW2



EXL010-DR2



EXL010-PL2



EXL010-PLW2



EXL010-PR2



EXL010-PL



EXL010-PR



EXL010-PD



EXL010-N



EXL010-B



EXL010-DB



EXL010-B-RSA



EXL010-WA



EXL010-DG

Description

- Universal Single or Double Face
- Energy Saving LED Lamps
- Aluminum Housing (Plastic also available in different items)
- Clear Acrylic Face Plate
- Direction of Narrow Can Be Done As Customers' Needs
- Universally Surface Mounted, Ceiling, Wall or End
- Universal J-box Mounting Pattern
- Green, white finish optional, Red or Green Letter Colors (Other designs consult our factory.)
- Die-cast Canopy Provided

Electrical

- Dual Voltage Input 110-277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Code Compliance

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, Input: 4.2W, Output: 0.7W, 90 Minutes Emergency Time 0.045A, LM>50
- 277V, Input: 4.2W, Output: 0.7W, 90 Minutes Emergency Time 0.019A, LM>50
- DC: LED Lamps

Warranty

- EXIT: 2-Year
- Battery: 15 Year Pro-rata

Accent Design Concepts




EMERGENCY LIGHT

EMERGENCY LIGHT

UL NUMBER: E472028



ITEM NO.:EMI101

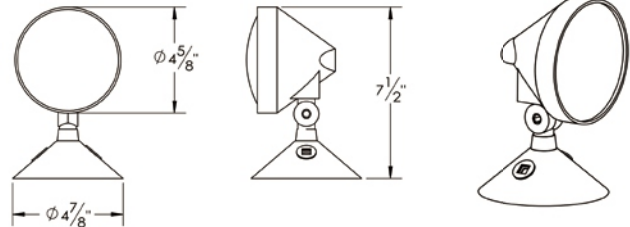


Fixture

- Injection-molded thermoplastic ABS housing.
- Fully adjustable glare-free single.
- 5" diameter canopy matching round mounting plate for 3" or 4" box standard.
- 6V 6W DC lamp for emergency light.
- Damp location listed.
- UL Number: E472028



ITEM NO.:EMI201

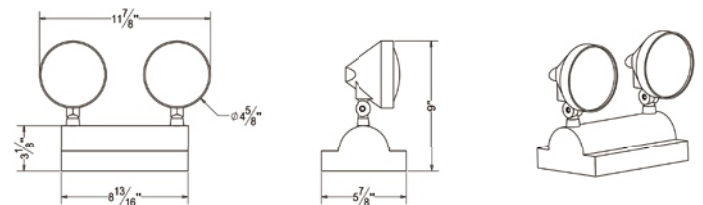

Fixture

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast and easy installation.
- Fully adjustable glare-free emergency light heads
- With push button test switch
- 100% solid-state switching
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- Low power consumption-3.8 watts at normal operation, 15 watts at emergency operation

Light Source

- 2X6V 5W wedge base T15 DC lamps for emergency mode.
- Lamps are operating in normal (AC input) and emergency (DC input) MODES.

Battery

- Battery backup (6V 4.5Ah)
- 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection.

Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

EMERGENCY LIGHT

UL NUMBER: E472028



ITEM NO.:EMI202




Fixture

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast and easy installation.
- Fully adjustable glare-free emergency light heads
- With push button test switch
- 100% solid-state switching
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- Low power consumption-3.8 watts at normal operation, 15 watts at emergency operation

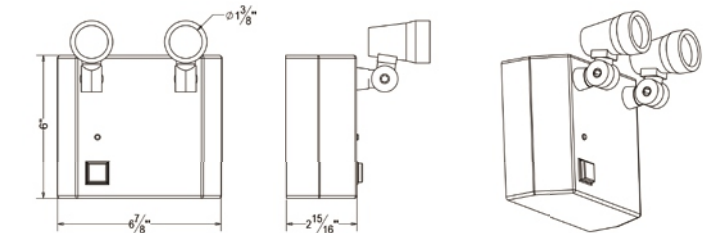

Light Source

- 2X6V 5W wedge base T15 DC lamps for emergency mode.
- Lamps are operating in normal (AC input) and emergency (DC input) MODES.

Battery

- Battery backup (6V 4.5Ah)
- 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection.

Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

ITEM NO.:EML203




Fixture

- Injection-molded thermoplastic ABS housing.
- UL 94V-0 flame rating.
- Innovative, snap-together design allows for fast and easy installation.
- Completely self-contained, fully automatic operation.
- Compact low-profile design in neutral finish.
- Push-to-test switch.
- Damp location listed.
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation.
- Test switch and charge rate indicator.

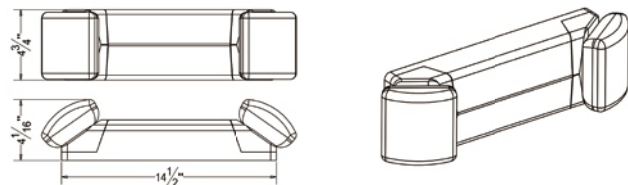

Light Source

- 2X6V 5.4W wedge base T15 DC lamps for emergency mode.

Battery

- 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection.

Mounting

- Universal (wall, side or ceiling) mounting

EMERGENCY LIGHT

UL NUMBER: E472028



ITEM NO.:EMI205



Fixture

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating.
- Two fully adjustable eyeball shape light heads for emergency light
- Innovative, snap-together design for fast installation
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- Low power consumption-3.8 watts at normal operation, 15 watts at emergency operation
- LED indicator light and push button test switch.
- Remote capability- may power additional remote heads (up to 6V 12W) with additional battery.

Light Source


- 2x6V 5.4W DC T5 wedge lamps for emergency mode

Battery

- Lead-Calcium Battery (6V 4.5Ah)
- May use additional battery, when add remote light heads to the fixture. (Total 2pcsx6V 4.5 Ah battery)
- Low voltage battery disconnection.

Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

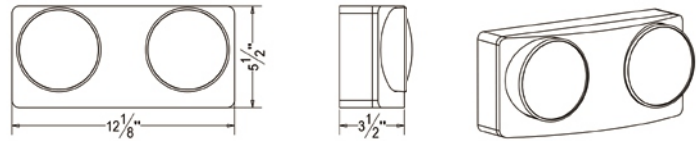

ITEM NO.:EMI206



Fixture

- Injection-molded thermoplastic ABS housing
- Completely self-contained.
- Fully automatic operation.
- Compact low-profile design.
- Push-to-test switch.
- Damp location listed.
- Two fully adjustable eyeball shape light heads for emergency light
- UL Number: E472028

Light Source

- Ultra-bright MR16 halogen/ LED lamps.

Electrical Technology


- 120/277 VAC Dual voltage operation.
- Test switch and charge rate indicator.
- Operation time-90 minutes.

Battery

- Battery backup
- Full Recharge Time is 24hrs (max.)
- Automatic low voltage disconnects (LVD).

Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

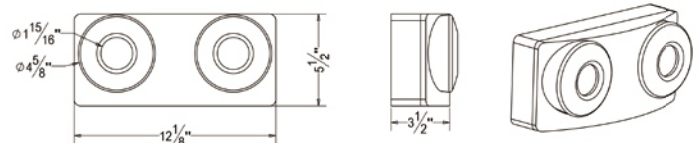


EMERGENCY LIGHT

UL NUMBER: E472028



ITEM NO.:EMI207

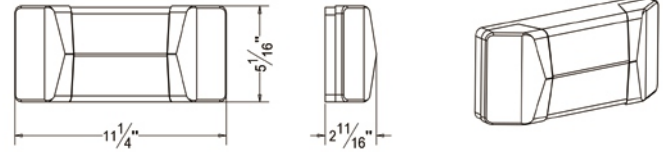

Fixture

- Injection-molded thermoplastic housing.
- Compact low-profile design in neutral finish.
- Universal mounting plate w/ Quick Connect for rapid installation.
- Two fresnel lenses maximize light output and provides glare-free light distribution.
- Push-to-test switch.
- Automatic low voltage disconnects (LVD).
- Damp location listed.
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation.
- Test switch and charge rate indicator.
- Operation time-90 minutes

Light Source

- 2X6V 5W wedge base T15 DC lamps for emergency mode.


Battery

- Full Recharge Time is 24hrs (max.), operation time-90 minutes.
- Automatic low voltage disconnects (LVD).

Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

ITEM NO.:EMI211

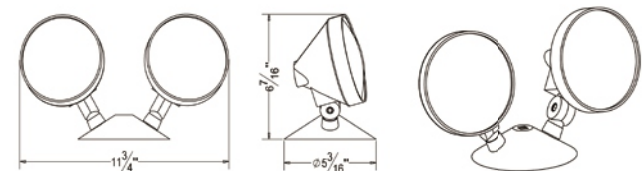

Fixture


- Injection-molded thermoplastic ABS housing.
- Fully adjustable glare-free single or double heads.
- 5" diameter canopy matching round mounting plate for 3" or 4" box standard.
- 6V 6W DC lamp for emergency light.
- Damp location listed.

EMERGENCY LIGHT

UL NUMBER: E472028



ITEM NO.: EML212

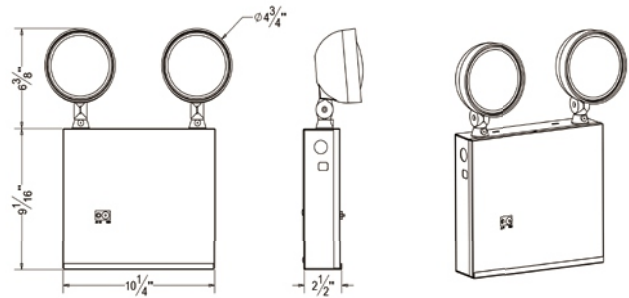

Description

- Bright 9 Watt Long Life Lamps
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- New York Style Other State Style Also Are Available
- Other State Styles Are Also Available
- Universally Surface Mounted, Ceiling, Wall or End
- Universal J-box Mounting Pattern

Electrical

- Dual Voltage Input 120/277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Battery

- Lead-acid storage battery
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- Rechargeable 6V

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Lamp Data

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, 7.1W, 90 Minutes Emergency Time, 0.066A
- 277V, 8W, 90 Minutes Emergency Time, 0.031A
- DC: LED Lamps


Warranty

- EXIT: 2-Year
- Battery: 15 Year Pro-rata

Accent Design Concepts




EXIT AND EMERGENCY
COMBO

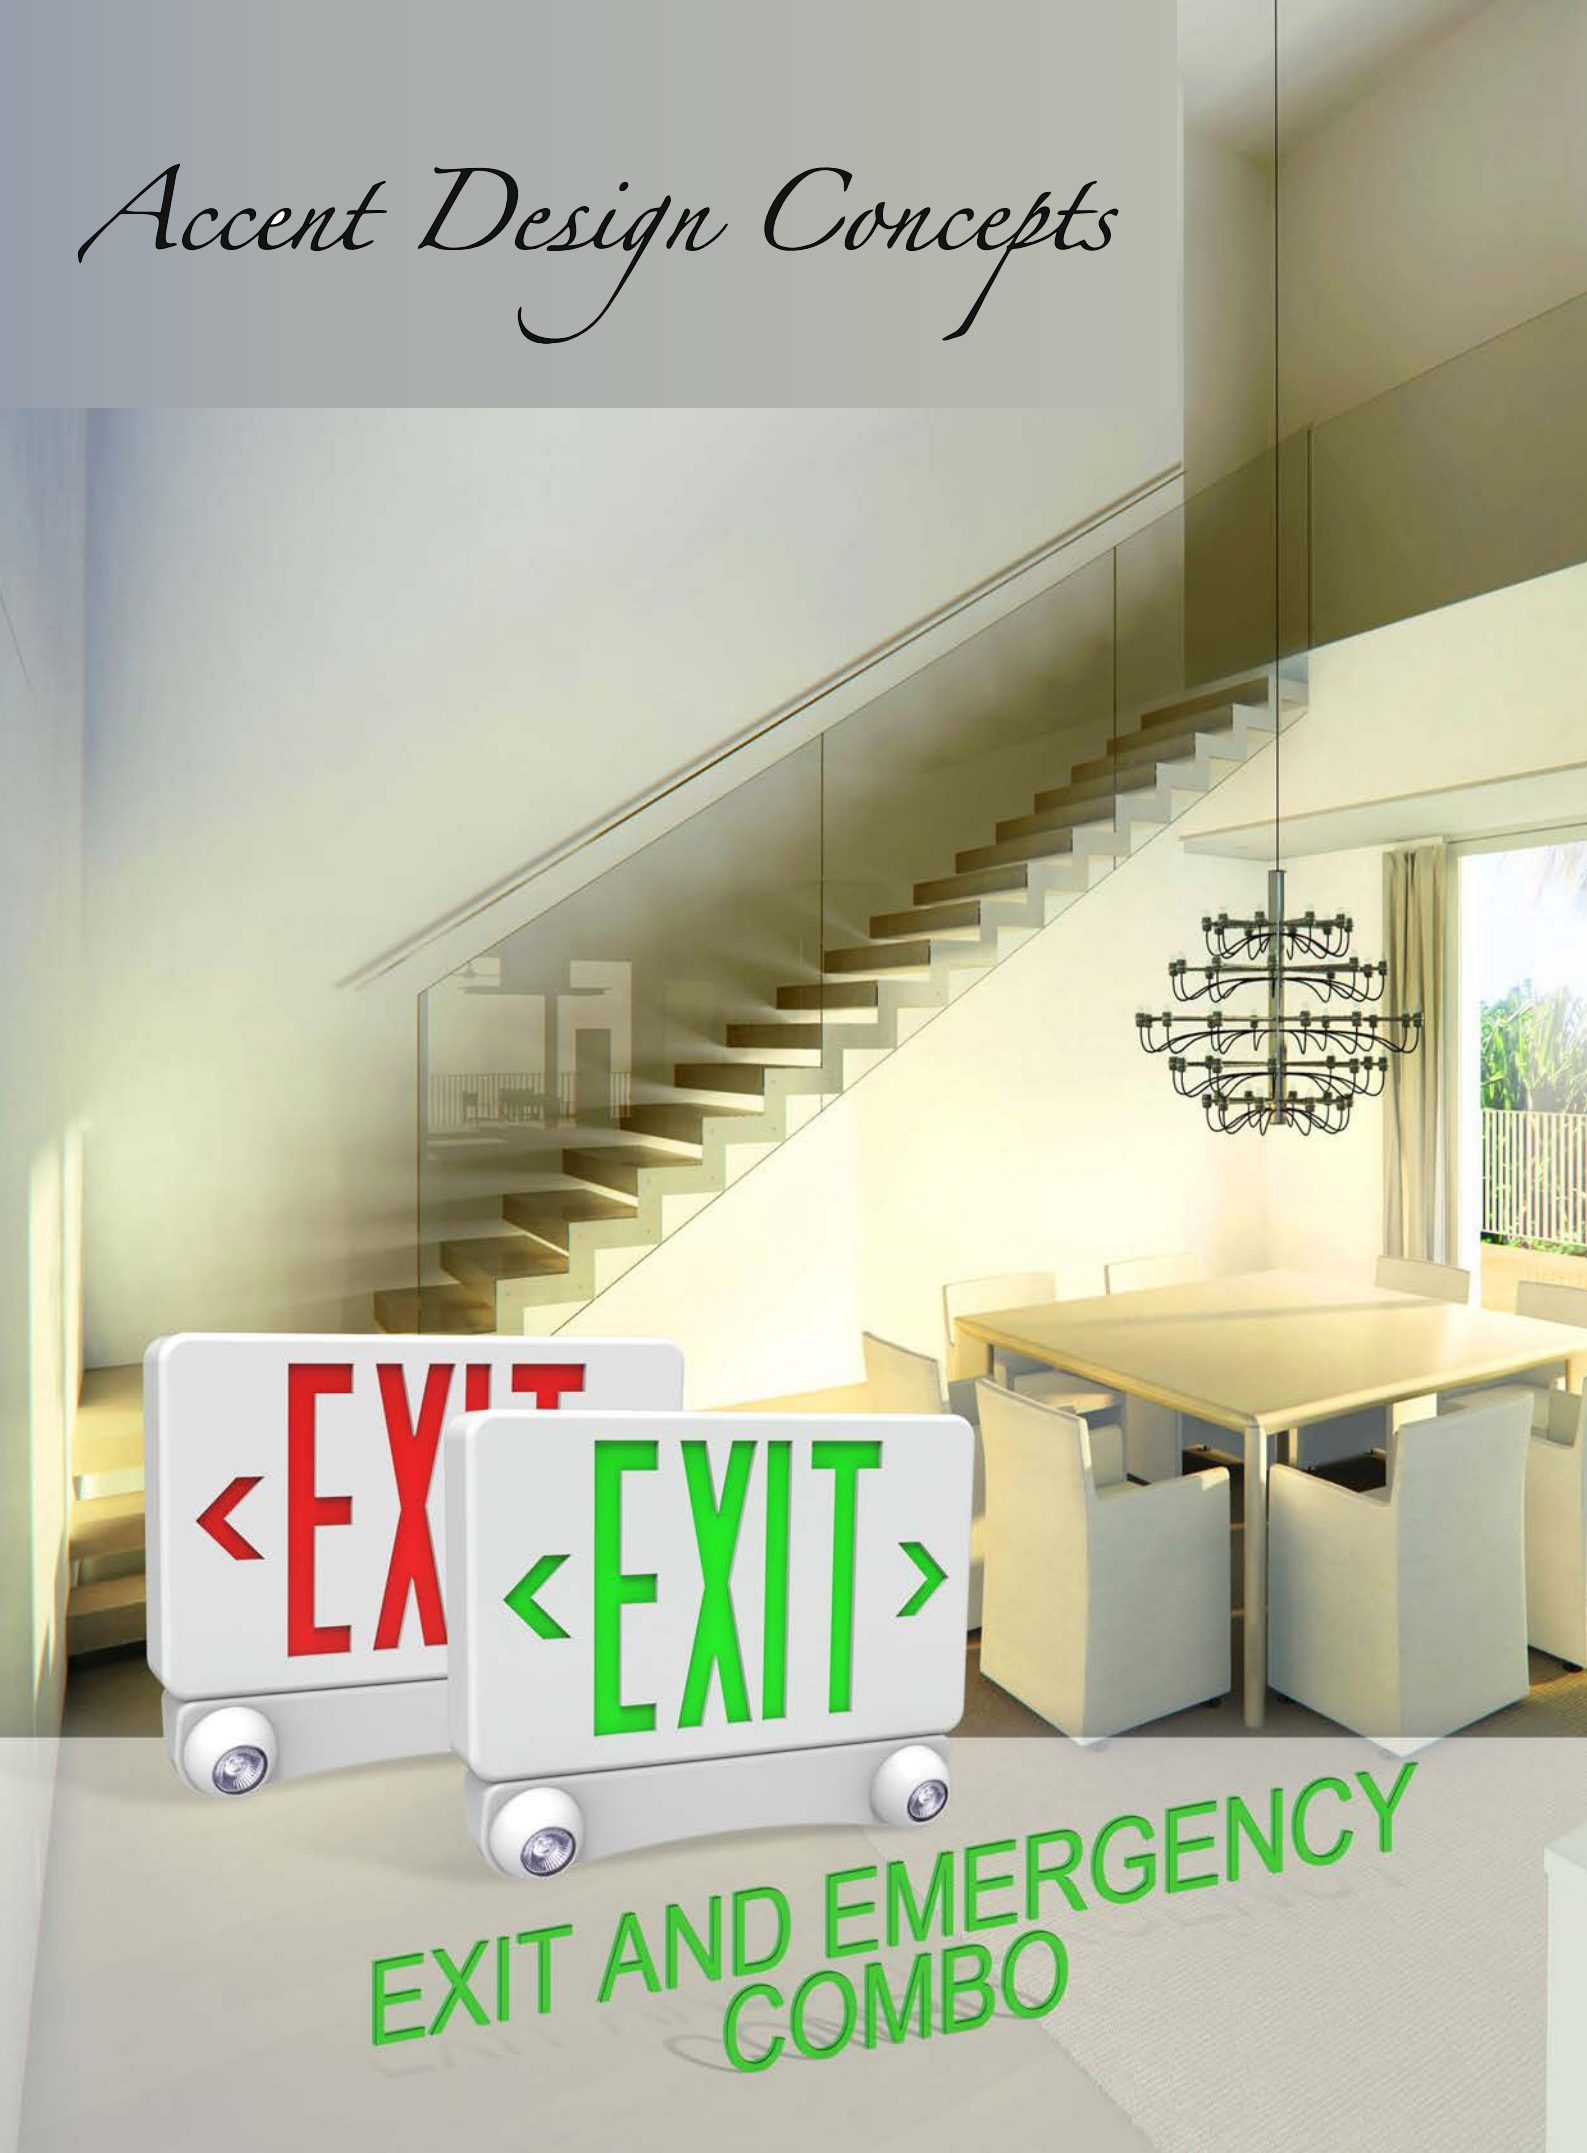

EXIT EMERGENCY COMBO

UL NUMBER: E472028

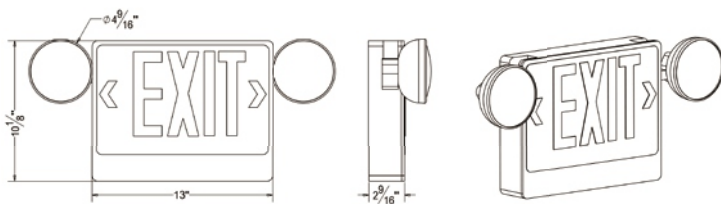

ITEM NO.:XML201

A	B	C	D	E	F
A	Series			E	Housing Color
XML201	Combo			W	White
				B	Black
B	Input Volt			E	Letter Color
277	120V			R	Red
U	277V			G	Green
	120-277V				
C	Light Source			F	Arrow
L	LEDs			N	No
I	Incandescent (For emergency head)			L	Left
				R	Right
				Q	Left and right
D	Battery				
	Battery backup				
AC	AC only				

Fixture

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating, fire-retardant
- LED indicator light and push button test switch
- Single face configuration
- Letters 6"height with 3/4"stroke
- Innovative, snap-together design allows for fast installation
- Replaceable directional chevron inserts are easily removed and reinserted

Electrical Technology

- 120/277 VAC Dual voltage operation
- LED indicator light and push button test switch.

Light Source

- LEDs mound on spirit circuit board (for exit sign)
- LED lamps are operating in normal (AC input) and emergency (DC input) MODES.

Battery

- 6V 4.5Ah battery
- 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection-preventing deep discharge damage to the battery.

Mounting

- Combination unit is suitable for surface ceiling, wall and pendant mounting.

EXIT EMERGENCY COMBO

UL NUMBER: E472028



ITEM NO.:EXL202

A	B	C	D	E	F
A	Series			E	Housing Color
XML202	Combo			W	White
				B	Black
B	Input Volt			E	Letter Color
277	120V			R	Red
U	277V			G	Green
	120-277V			F	Arrow
C	Light Source			N	No
L	LEDs			L	Left
I	Incandescent (For emergency head)			R	Right
				Q	Left and right
D	Battery				
	Battery backup				
AC	AC only				



Fixture

- Injection-molded thermoplastic ABS housing.
- Combination housing design, exit & emergency unit.
- UL 94V-0 flame rating.
- Innovative, snap-together design allows for fast installation.
- Letter 6" height with 3/4" stroke.
- Two fully adjustable compact size eyeball shape light heads for emergency light.
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- Low power consumption: 2.3 watts at normal operation, 12 watts at emergency operation.
- LED indicator light and push button test switch.

Light Source

- LEDs mounted on print circuit board (For Exit Sign); LEDs or incandescent light source for emergency.
- LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- 2 X 6V 5.4 or 6W wedge base T15 DC lamps for emergency mode.

Battery



- 6V 4.5Ah battery
- 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection-preventing deep discharge damage to the battery.

Mounting

- Combination unit is suitable for surface ceiling, wall and pendant mounting.

EXIT EMERGENCY COMBO

UL NUMBER: E472028



ITEM NO.:XML203

A	B	C	D	E	F
A	Series			E	Housing Color
XML203	Combo			W	White
				B	Black
B	Input Volt			E	Letter Color
277	120V			R	Red
U	277V			G	Green
	120-277V				
C	Light Source			F	Arrow
L	LEDs			N	No
I	Incandescent (For emergency head)			L	Left
				R	Right
				Q	Left and right
D	Battery				
	Battery backup				
AC	AC only				

Fixture

- Injection-Molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast installation.
- Letter 6" height with 3/4" stroke.
- Low energy consumption
- Lead-calcium battery

Electrical Technology

- 120/277VAC Dual voltage operation
- LED indicator light and push button test switch.

Light Source

- LEDs mounted on print circuit board. (For Exit Sign)
- LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- 2x6V 5.4W LED MR16 lamps for emergency mode

Battery


- Battery backup (6V 4.5Ah)
- 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection-preventing deep discharge damage to the battery.

Mounting

- Combination unit is suitable for surface ceiling, wall and pendant mounting.

EXIT EMERGENCY COMBO

UL NUMBER: E472028

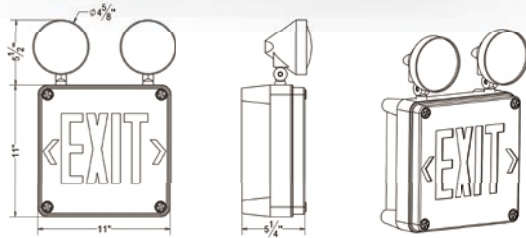

ITEM NO.:XML205

A	B	C	D	E	F
A Series		E Housing Color			
XML205	Combo	W White		B Black	
B Input Volt		E Letter Color			
277	120V	R Red		G Green	
U	277V	F Arrow			
C Light Source		N No			
L	LEDs	L Left		R Right	
I	Incandescent (For emergency head)	Q Left and right			
D Battery					
AC	Battery backup				
	AC only				

Fixture

- Fully gasketed polycarbonate lens and ABS thermoplastic housing.
- Innovative design allows for fast installation.
- Knockout directional chevrons.
- Letters 6" height with 3/4" stroke
- Single face configuration only
- Optional emergency heads
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- Low energy consumption-only 2.5 watts at 120V
- LED indicator light and push button test switch.

Light Source

- LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- Optional 6V SEALED BEAM lamp heads

Battery


- AC only, No battery backup
- Battery backup, 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection- Preventing deep discharge damage to the battery.

Mounting

- Wall, ceiling or end mounting configurations are available.

EXIT EMERGENCY COMBO

UL NUMBER: E472028

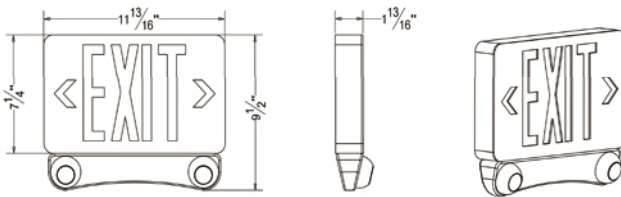

ITEM NO.:XML206

A	B	C	D	E	F
A	Series			E	Housing Color
XML206	Combo			W	White
				B	Black
B	Input Volt			E	Letter Color
277	120V			R	Red
U	277V			G	Green
	120-277V				
C	Light Source			F	Arrow
L	LEDs			N	No
I	Incandescent (For emergency head)			L	Left
				R	Right
				Q	Left and right
D	Battery				
	Battery backup				
AC	AC only				

Fixture

- Injection-Molded thermoplastic ABS housing
- Combination housing design, exit & emergency unit.
- Plastic enclosure with UL94-5VA flame rating.
- Innovative, snap-together design allows for fast installation.
- Letter 6" height with 3/4" stroke
- Emergency lights can be adjusted. (Side mounting or Top mounting)
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- LED indicator light and push button test switch.
- Low power consumption 2.8 watts at normal operation, 3.5 watts at emergency operation.

Light Source

- 2 X LED light heads for emergency mode.
- 70lm output on emergency operation.

Battery

- 24 hours recharge after 90 minutes discharge.
- Low voltage battery disconnection-preventing deep discharge damage to the battery.

Mounting


- Combination unit is suitable for surface ceiling, wall and pendant mounting.

EXIT EMERGENCY COMBO

UL NUMBER: E472028



ITEM NO.:XML207

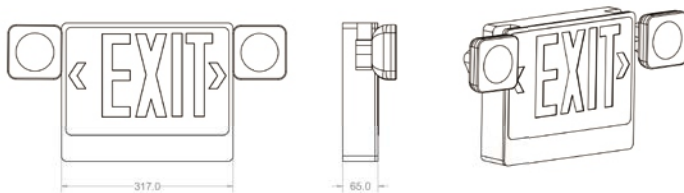

A	B	C	D	E	F
XML207	Series Combo			E	Housing Color W White B Black
277 U	Input Volt 120V 277V 120-277V			E	Letter Color R Red G Green
	L	C		F	Arrow N No L Left R Right Q Left and right
AC	D				
	LEDs I Incandescent (For emergency head)	Light Source	Battery Battery backup AC AC only		

Fixture

- Injection-molded thermoplastic ABS housing.
- UL 94V-0 flame rating.
- Use small square head.
- Innovative, snap-together design allows for fast installation.
- Replaceable directional chevron inserts are easily removed and reinserted.
- Letters 6" height with 3/4" stroke.
- Damp Location Rated.
- UL Number: E472028

Electrical Technology

- 120/277VAC Dual voltage operation
- LED indicator light and push button test switch.

Light Source

- LEDs mounted on print circuit board. (For Exit Sign)
- LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- 2 X 6V 6W halogen MR-16 lamps for emergency mode.

Battery


- Lead-Acid Battery (6V 4.5Ah)
- May use additional battery, when add remote light heads to the fixture. (Total 2pcs x 6V 4.5Ah battery)
- Low voltage battery disconnection.

Mounting

- Combination unit is suitable for surface ceiling, wall and pendant mounting.

EXIT AND EMERGENCY COMBO

UL NUMBER: E472028

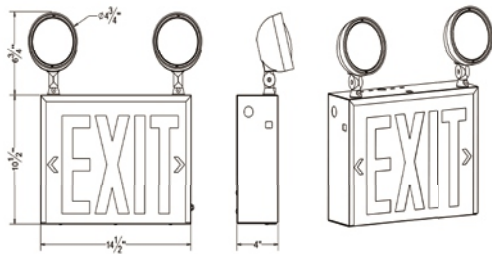

ITEM NO.:XML208

A	B	C	D	E	F
A	Series			E	Letter Color
XML208	Exit sign			R	Red
				G	Green
B	Input Volt			E	Face
277	120V			W	Single
U	277V			B	Double
	120-277V				
C	Battery			F	Lamp Head
	Battery backup			2	2 Heads
AC	AC only No battery			3	3 Heads

Description

- Bright 9 Watt Long Life Lamps Three Heads
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- Other State Style Are Also Available
- Universally Surface Mounted, Ceiling ,Wall or End
- Universal J-box Mounting Pattern
- Red or Green Letter Colors

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- Rechargeable 6V

Lamp Date

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, 3.22W, 90 Minutes Emergency Time, 0.0295A
- 277V, 3.16W, 90 Minutes Emergency Time, 0.0127A
- DC: LED Lamps

Electrical

- Dual Voltage Input 120/277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Warranty

- EXIT: 2-Year
- Battery: 15 Year Pro-rata