


# Accent Design Concepts

## Y0901 SPOT LIGHT

Catalog #		Prepared by	
Project		Date	
Notes			

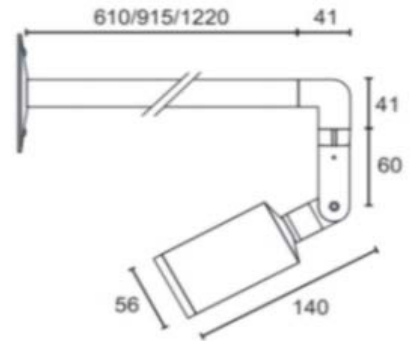

### Outdoor Aluminum Spot Light

#### Description

- 1) Available in white, black or bronze die-cast aluminum. 316 stainless steel is also available  
Custom finishes available by special order.
- 2) 1" diameter machined aluminum stem with 1/2" NPT threads at each end. Stem length available in 24", 36" and 48" lengths
- 3) 90 degree adapter provides transition from fixture to stem.
- 4) High temperature silicone O-ring set screw provides water tight seal.
- 5) Easy re-lamping with lamp cover secured by a flush tamper-proof aiming and 360 degree of horizontal rotation
- 6) Integral knuckle provides 196 degree of vertical
- 7) Tamper proof socket head screws ensures precise aiming
- 8) Lamp cover is sealed with a static O-ring.
- 9) Tempered glass lens is standard.
- 10) 1/2" pipe thread for mounting to junction box

#### Installation:

Machined aluminum canopy mounts to standard 3 1/2" octagon junction box or 4" junction box.

#### Integral Wiring:

18AWG tefl on coated wire 600V rated 250°C

#### Hardware

Stainless steel tamper-proof screws are flush mounted  
Set of allen keys included with every fixture

#### Order Matrix

A    B    C    D    E    F    G

<b>Item No. Y0901</b>	
-----------------------	--

A	Series
Y0901	Wall/Spot light

B	Material & Finish
B	Aluminum/black
W	Aluminum/white
BR	Aluminum/bronze
SV	Aluminum/Silver
ST6	316 Stainless Steel
ST4	304 Stainless Steel

C	Stem Length
24	24"
36	36"
48	48"

D	Lamp
MR16	MR16
GU10	GU10

E	Light Source & Wattage
L3	LED 3W
H50	Halogen 50W

SPOT LIGHT

Litcharbor Lighting Technology Co., Ltd.



Accent Design Concepts, LLC.

Orlando, Florida 32824

Email: Sales@accentdesignconcepts.com

Website: www.accentdesignconcepts.com

Specifications subject to change w/o notice

# Accent Design Concepts

## Y0901 SPOT LIGHT

Catalog #		Prepared by	
Project		Date	
Notes			

### Accessories

- 1) Lens cap accommodates accessory holder LH3.  
Allows the use of up-to (3)1-5/8" media/color filters.  
Must order separately.
- 2) IPV100 directional shield provides 45 degree cutoff  
Available in aluminum or stainless steel

E	Color Temperature(LED)
27K	2700K
30K	3000K
35K	3500K
60K	6000K

### Lamp

#### 1) Low voltage Halogen

MR16 lamp 12V 50W max GU5.3 socket

F	Accessories
IPV100	45° Cutoff directional shield

#### 2) MR16 LED

3W High brightness LED


Heat sinking: Integral to the fixture

Color temperature do at customers' needs

G	Accessories
IPV100	45° Cutoff directional shield

Other Special Requirements please Confirm with Factory

#### 3)Line Voltage GU10 lamp is also Available



SPOT LIGHT



Accent Design Concepts, LLC.  
Orlando, Florida 32824  
Email: Sales@accentdesignconcepts.com

Website: www.accentdesignconcepts.com  
Specifications subject to change w/o notice