
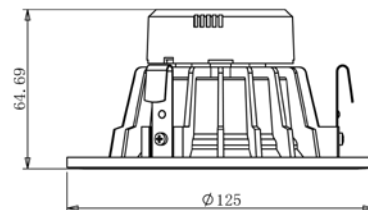


4" LED Downlight Module Retrofit



ORDER MATRIX | Example: BL4001

A	B	C	D	E	F
A	Series				
BL4001	4" LED Downlight Module				
B	Input Voltage				
	120V				
277	277V				
U	120-277V				
C	Dimmable				
	Non-Dimmable				
DM	Dimmable				
D	LED Available				
Cree	Cree				
Citizen	Citizen				
Epistar	Epistar				
Seoul	Seoul				
Osram	Osram				
E	Lumen Output				
600	600 Lumen				
800	800 Lumen				
F	Color Temperature				
27K	2700K				
40K	4000K				
50K	5000K				

Description

- ② All-in-one LED retrofit trim designed to use with Liteharbor 4 inch recessed residential downlights
- ② Provide 50000 hours of life at 70% lumen maintenance
- ② No lead or mercury
- ② Trim shipped with a medium base socket adapter whip
- ② Available with dedicated Emergency Battery Back-up

LED Light Engine

- ② Cree true white® technology available
- ② CRI>80%
- ② Color temperature 2700K-5000K
- ② Rated for 50000 hours at 70% lumen output

Driver

- ② Dedicated 120 volt driver
- ② Power factor >0.9
- ② Dimmable to 10% with most brand dimmers
- ② Rated for 50 to 60Hz at 120V/277V input
- ② Produces less than 20% THD

Wattage

- ② Input Power: 10W -12W (+/- 5%)
- ② Lumens: 600LM-800LM

Listing & Warranty

- ② ETL listed to US and Canadian standards for wet locations
- ② 5 Year Limited Warranty