


4" LED Downlight Square Retrofit

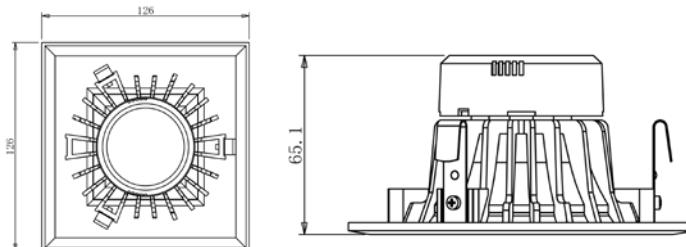

ORDER MATRIX | Example: BSL4001

A	B	C	D	E	F
A	Series				
BSL4001	4" LED Downlight Square				
B	Input Voltage				
	120V				
277	277V				
U	120-277V				
C	Dimmable				
	Non-Dimmable				
DM	Dimmable				
D	LED Available				
Cree	Cree				
Citizen	Citizen				
Epistar	Epistar				
Seoul	Seoul				
Osram	Osram				
E	Lumen Output				
600	600 Lumen				
800	800 Lumen				
F	Color Temperature				
27K	2700K				
40K	4000K				
50K	5000K				

Description

- ⌚ All-in-one LED retrofit trim designed to use with Liteharbor 4 inch recessed residential downlights
- ⌚ Provide 50000 hours of life at 70% lumen maintenance
- ⌚ No lead or mercury
- ⌚ Trim shipped with a medium base socket adapter whip
- ⌚ Available with dedicated Emergency Battery Back-up

LED Light Engine

- ⌚ Cree true white® technology available
- ⌚ CRI>80%
- ⌚ Color temperature 2700K-5000K
- ⌚ Rated for 50000 hours at 70% lumen output

Driver

- ⌚ Dedicated 120 volt driver
- ⌚ Power factor >0.9
- ⌚ Dimmable to 10% with most brand dimmers
- ⌚ Rated for 50 to 60Hz at 120V/277V input
- ⌚ Produces less than 20% THD

Wattage

- ⌚ Input Power: 10W -12W (+/- 5%)
- ⌚ Lumens: 600LM-800LM

Listing & Warranty

- ⌚ ETL listed to US and Canadian standards for wet locations
- ⌚ 5 Year Limited Warranty

