


6" LED Downlight Deep Reflector Retrofit

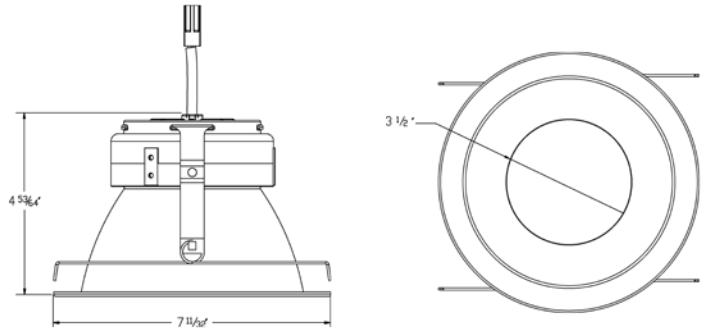

ORDER MATRIX | Example: BRL6001-SF

A	B	C	D	E	F
	A	Series			
BRL6001-SF	6"	LED Downlight Deep Reflector			
	B	Input Voltage			
		120V			
277		277V			
U		120-277V			
	C	Dimmable			
		Non-Dimmable			
DM		Dimmable			
	D	LED Available			
Cree		Cree			
Citizen		Citizen			
Epistar		Epistar			
Seoul		Seoul			
Osram		Osram			
	E	Lumen Output			
1100		1100 Lumen			
1400		1400 Lumen			
	F	Color Temperature			
30K		3000K			
40K		4000K			
50K		5000K			

ORDER MATRIX

<u>A</u>	<u>B</u>	<u>C</u>
A	Trim	
SF	Self Flanged	
SFW	Self Flanged White	
B	Reflector Finish	
CL	Clear	
HZ	Haze	
WH	White	
C	Lens Type	
CR	Clear Tempered	
SB	Sand Blasted	

Description

- ① Eco-friendly no lead or mercury
- ① Compatible with Liteharbor 6 inch recessed downlight
- ① Designed to last a minimum 50,000 hours at L70
- ① Dimmable to 10% with most brand dimmers

Reflector

- ① Reflector is designed to gather the light scattered by the led chip and shape it into functional beams that minimize brightness and glare while eliminating lamp image
- ① Reflector is high quality available in clear, semi diffuse or white finish. Self flange trim is standard.

Features

- ① Deep set LED for superior glare and cut-off
- ① Cree True White® technology
- ① Comprehensive solution with driver electronics, optics and core thermals
- ① Versatile form factor for small-aperture designs

LED Module

- ① 1100 lumen LED
- ① With integral power supply
- ① Module lumen output: 1100 lm
- ① CRI: 80+
- ① CCT: 3000K-5000K
- ① 1400 lumen LED
- ① With integral power supply
- ① Module lumen output: 1400 lm
- ① CRI: 80+
- ① CCT: 3000K-5000K

Mounting

- ① Torsion spring safely secure LED trim and module to housing.

Listing & Warranty

- ① ETL listed to US and Canadian standards for wet locations
- ① 5-Year Limited Warranty

