


6" LED Downlight Shallow Reflector Retrofit

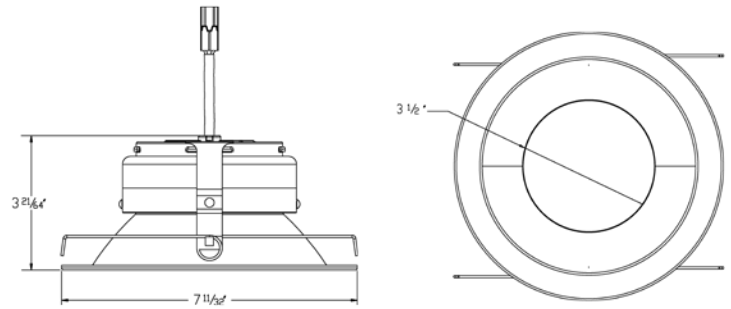

ORDER MATRIX | Example: BRL6002-SF

A	B	C	D	E	F
A	Series				
BRL6002-SF	6" LED Downlight Shallow Reflector				
B	Input Voltage				
	120V				
277	277V				
U	120-277V				
C	Dimmable				
	Non-Dimmable				
DM	Dimmable				
D	LED Available				
Cree	Cree				
Citizen	Citizen				
Epistar	Epistar				
Seoul	Seoul				
Osram	Osram				
E	Lumen Output				
1100	1100 Lumen				
1400	1400 Lumen				
F	Color Temperature				
30K	3000K				
40K	4000K				
50K	5000K				

Description

- ② Eco-friendly no lead or mercury
- ② Compatible with Liteharbor 6 inch recessed downlight
- ② Designed to last a minimum 50,000 hours at L70
- ② Dimmable to 10% with most brand dimmers

Reflector

- ② Reflector is designed to gather the light scattered by the led chip and shape it into functional beams that minimize brightness and glare while eliminating lamp image
- ② Reflector is high quality available in clear, semi diffuse or white finish. Self flange trim is standard.

Features

- ② Deep set LED for superior glare and cut-off
- ② Cree True White® technology
- ② Comprehensive solution with driver electronics, optics and core thermals
- ② Versatile form factor for small-aperture designs

LED Module

- ② 1100 lumen LED
- ② With integral power supply
- ② Module lumen output: 1100 lm
- ② CRI: 80+
- ② CCT: 3000K-5000K
- ② 1400 lumen LED
- ② With integral power supply
- ② Module lumen output: 1400 lm
- ② CRI: 80+
- ② CCT: 3000K-5000K

Mounting

- ② Torsion spring safely secure LED trim and module to housing.

Listing & Warranty

- ② ETL listed to US and Canadian standards for wet locations
- ② 5-Year Limited Warranty

ORDER MATRIX

A	B	C
A	Trim	
SF	Self Flanged	
SFW	Self Flanged White	
B	Reflector Finish	
CL	Clear	
HZ	Haze	
WH	White	
C	Lens Type	
CR	Clear Tempered	
SB	Sand Blasted	

