

Specification Sheet for 240LED/m SMD3528 LED Flexible Strips



Applications:


- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting

Product features:

- ◆ Various angle 120degrees
- ◆ With adhesive tape on backside
- ◆ Made of high quality LEDs
- ◆ Work Voltage: DC24V
- ◆ Every Six LED can be cut
- ◆ UL, CUL, CE, ROHS Approved



Dimensions Drawing

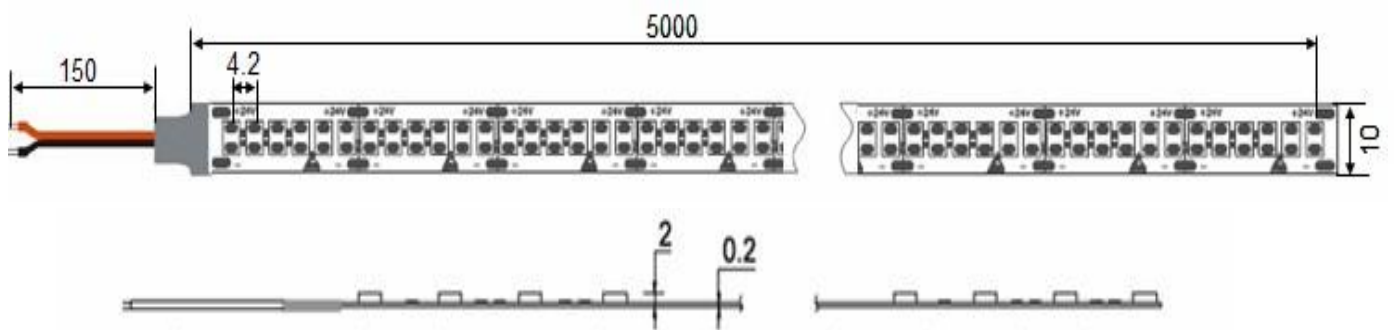


Unit: mm

Specifications

Model No.	Color	LED Qty	λ (Nm)/(CT:K)	Luminous Flux (lm/m)	PCB Size (mm)	Work Voltage	Power	Water proof	Packing
CRI$\geq$90 Version									
F3528A120SAL-W-24-S1	Warm White	240LED/m	2500-3500K	1600-1700	10	DC24V	19.2W/m	IP20	5m/reel
F3528A120SAL-N-24-S1	Nature White		4000-4500K	1700-1800					
F3528A120SAL-P-24-S1	Pure White		6000-7000K	1800-1900					

Model No.	Color	LED Qty	λ (Nm)/(CT:K)	Luminous Flux (lm/m)	PCB Size (mm)	Work Voltage	Power	Water proof	Packing
Around CRI70 Version									
F3528A120-W-24-S1	Warm White	240LED/m	2200-3500K	1400-1500	10	DC24V	19.2W/m	IP20	5m/reel
F3528A120-N-24-S1	Nature White		4000-4500K	1500-1600					
F3528A120-P-24-S1	Pure White		6000-7000K	1650-1700					
F3528A120-B-24-S1	Blue		455-470	400-450					
F3528A120-G-24-S1	Green		510-525	900-1000					

Connection drawings

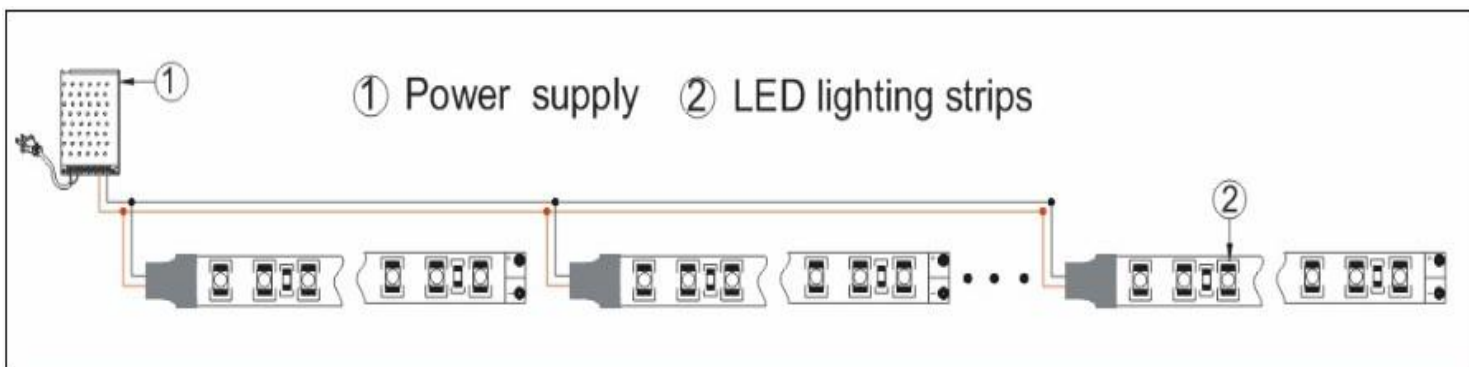

Notice:

Before application, please make sure the power supply is in accordance to the strip