


## Specification Sheet for SMD3528 Angle Adjustable LED Flexible Strips

| Model No.                             | Color        | LED Qty | $\lambda$ (Nm)/(CT:K) | Luminous Flux (lm/m) | PCB Size (mm) | Work Voltage | Power  | Water proof | Packing |
|---------------------------------------|--------------|---------|-----------------------|----------------------|---------------|--------------|--------|-------------|---------|
| <b>CRI<math>\geq</math>90 Version</b> |              |         |                       |                      |               |              |        |             |         |
| F3528A35SA-W-24-AG                    | Warm White   | 70LED/m | 2500-3500K            | 600-620lm            | 5+8mm         | DC24V        | 7.2W/m | IP20        | 5m/reel |
| F3528A35SA-N-24-AG                    | Nature White |         | 4000-4500K            | 620-650lm            |               |              |        |             |         |
| F3528A35SA-P-24-AG                    | Pure White   |         | 6000-7000K            | 700-750lm            |               |              |        |             |         |

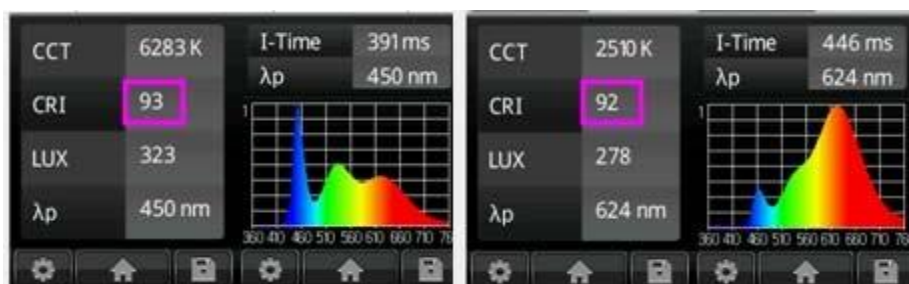

### Applications:


- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting

### Product features:

- ◆ Various angle 120 degrees
- ◆ With self-adhesive back, 7LEDs a group for DC24V
- ◆ Work Voltage: DC24V
- ◆ Angle Adjustable Degree: 180 degree
- ◆ UL, CUL, CE, ROHS Approved



## Dimensions Drawing

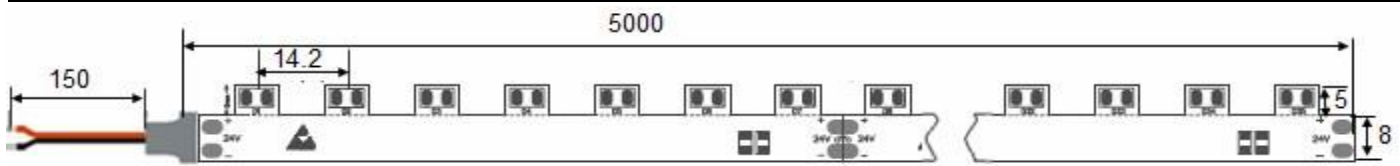


Unit: mm

## Specifications

| Model No.          | Color        | LED Qty | $\lambda$ (Nm)/(CT:K) | Luminous Flux (lm/m) | PCB Size (mm) | Work Voltage | Power  | Water proof | Packing |
|--------------------|--------------|---------|-----------------------|----------------------|---------------|--------------|--------|-------------|---------|
| Normal CRI Version |              |         |                       |                      |               |              |        |             |         |
| F3528A35-W-24-AG   | Warm White   | 70LED/m | 2200-3500K            | 490-510              | 5+8mm         | DC24V        | 4.8W/m | IP20        | 5m/reel |
| F3528A35-N-24-AG   | Nature White |         | 4000-4500K            | 520-540              |               |              |        |             |         |
| F3528A35-P-24-AG   | Pure White   |         | 6000-7000K            | 550-570              |               |              |        |             |         |
| F3528A35-R-24-AG   | Red          |         | 620-630               | 190-200              |               |              |        |             |         |
| F3528A35-Y-24-AG   | Yellow       |         | 585-595               | 190-200              |               |              |        |             |         |
| F3528A35-B-24-AG   | Blue         |         | 455-470               | 110-130              |               |              |        |             |         |
| F3528A35-G-24-AG   | Green        |         | 510-525               | 360-380              |               |              |        |             |         |

## Connection drawings (RGB)

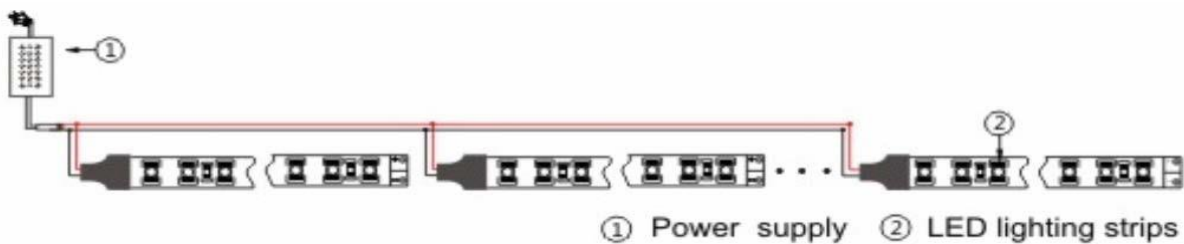

## Notice:

Before application, please make sure the power supply is in accordance to the strips

Web: [www.accentdesignconcepts.com](http://www.accentdesignconcepts.com) e-mail: [sales@accentdesignconcepts.com](mailto:sales@accentdesignconcepts.com)