


Specification Sheet for CRI90 SMD 3528 Constant Voltage Flexible Strips

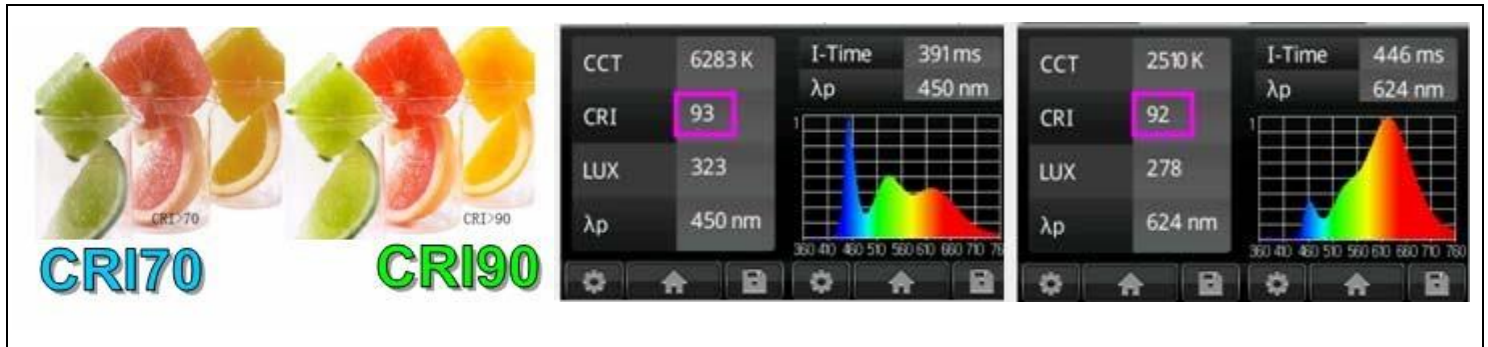

Applications:


- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting

Product features:


- ◆ Various angle 120degrees
- ◆ With self-adhesive tape on backside, 3LEDs a group for DC12V 6LEDs group for DC24V
- ◆ Made of high quality LED
- ◆ Work Voltage: DC12V/DC24V
- ◆ UL, CUL, CE, ROHS Approved




Dimension Drawings (120LED/m)

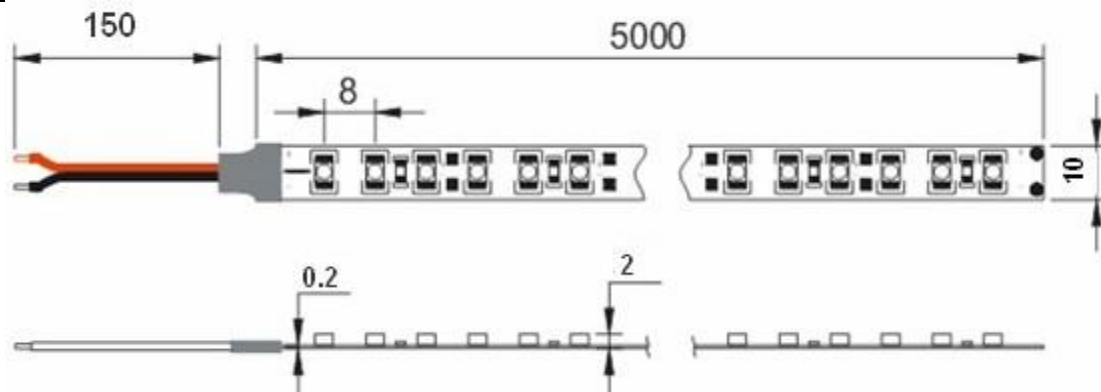

Dimension Drawings (78LED/m)

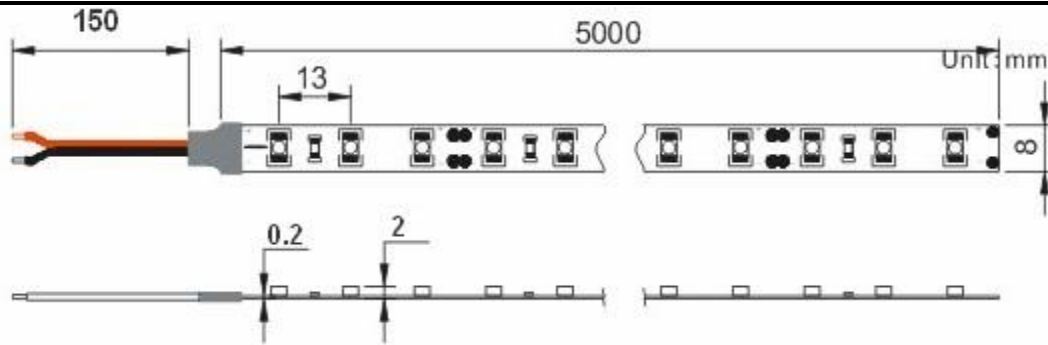

Dimension Drawings (60LED/m)

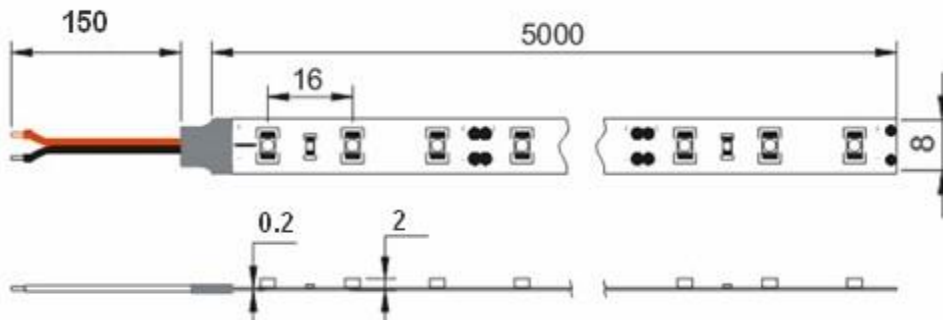


Unit: mm

Specifications

Model No.	LED Type	LED Qty (m)	Work Voltage	Power	PCB Size	Waterproof	Color	λ (Nm)/(CT:K)	Lumen (lm/m)
CRI$\geq$90 Version									
F3528X60SA-P-12/24	SMD3528	120	DC24V/ DC12V	14.4W/m	10mm	IP20/IP67	☐ Pure White	6000-7000K	1200-1300
F3528X60SA-N-12/24							☐ Nature White	4000-4500K	1100-1200
F3528X60SA-W-12/24							☐ Warm White	2500-3500K	1000-1100
F3528X39SA-P-12/24	SMD3528	78	DC24V/ DC12V	9.4W/m	8mm	IP20/IP67	☐ Pure White	6000-7000K	800-850
F3528X39SA-N-12/24							☐ Nature White	4000-4500K	750-800
F3528X39SA-W-12/24							☐ Warm White	2500-3500K	700-750
F3528X30SA-P-12/24	SMD3528	60	DC24V/ DC12V	7.2W/m	8mm	IP20/IP67	☐ Pure White	6000-7000K	600-650
F3528X30SA-N-12/24							☐ Nature White	4000-4500K	550-600
F3528X30SA-W-12/24							☐ Warm White	2500-3500K	530-550

Remark: X is for Waterproof type. A for Non-waterproof, C for IP67 Version

Connection drawings of Single Color

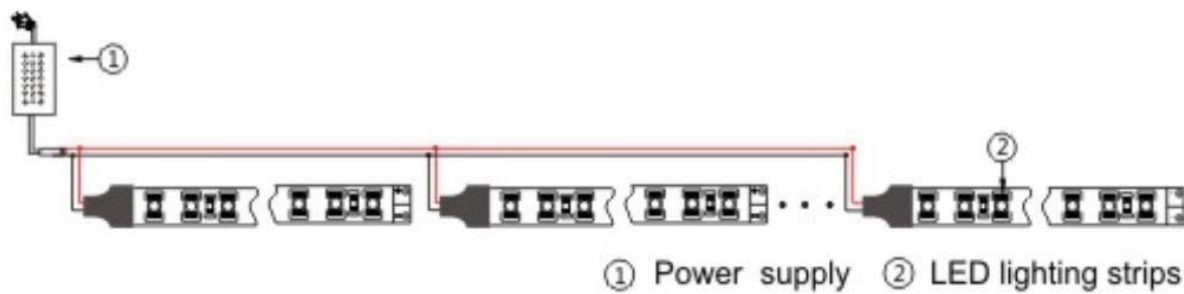

Notice:

Before Application, please ensure correct input of Positive & Negative Pole, otherwise, the strips will be damaged