


Specification Sheet for Double-Line SMD 3528 LED Flexible Strips

Applications:

- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting
- ◆ Various angle 120 degrees
- ◆ With self-adhesive tape on backside, 6LEDs a group for DC24V
- ◆ Made of high quality LEDs
- ◆ Work Voltage: 24V
- ◆ UL, CUL, CE, ROHS Approved



Dimensions for OL-F3528X120-X-24

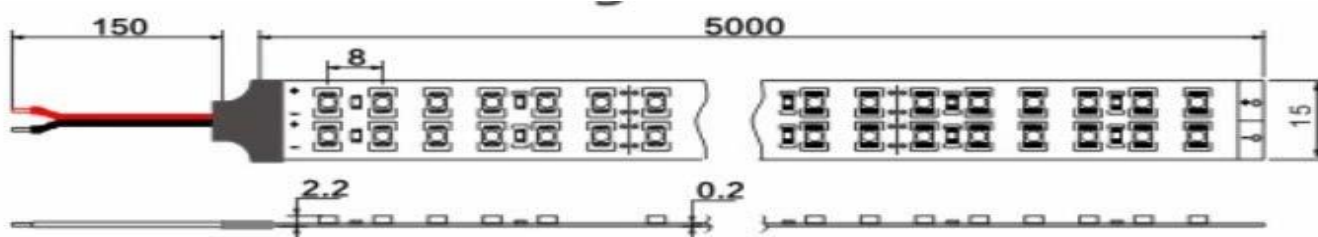

Specifications

Unit:mm

Model No.	Color	LED Qty	λ (Nm)/(CT:K)	Luminous Flux/m	PCB Size mm	Work Voltage	Power	Water proof
F3528X120-R-24	Red	SMD 3528 240/m	620-630	650-700lm	15mm	DC24V	19.2W/m	IP20 /IP67
F3528X120-Y-24	Yellow		585-595	450-480lm				
F3528X120-B-24	Blue		455-470	400-450lm				
F3528X120-G-24	Green		510-525	900-1000lm				
F3528X120-P-24	Pure White		6000-7000K	1600-1700lm				
F3528X120-N-24	Nature White		4000-4500K	1500-1600lm				
F3528X120-W-24	Warm White		2200-3500K	1300-1400lm				

Remark:

X is for Waterproof type. A for Non-waterproof, C for IP67

Connection drawings (Single Color)



Notice:

Before application, please make sure the power supply is in accordance to the strips