
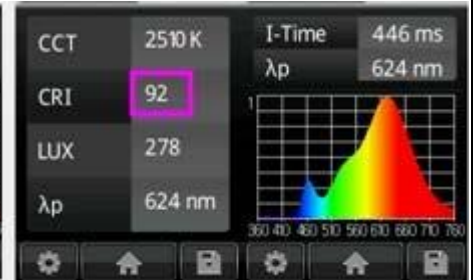


Specification Sheet for Color-Temperature Adjustable LED Strips

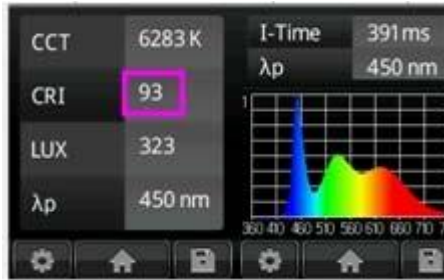


Applications:

- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting

Product features:

- ◆ Various angle 120degrees
- ◆ With self-adhesive tape on back side, 6LEDs a group for DC12V version and 12 LEDs a group for DC24V version
- ◆ Made of high quality LEDs
- ◆ Work Voltage: DC12V/24V
- ◆ UL, CUL, CE, ROHS Approved

Dimensions

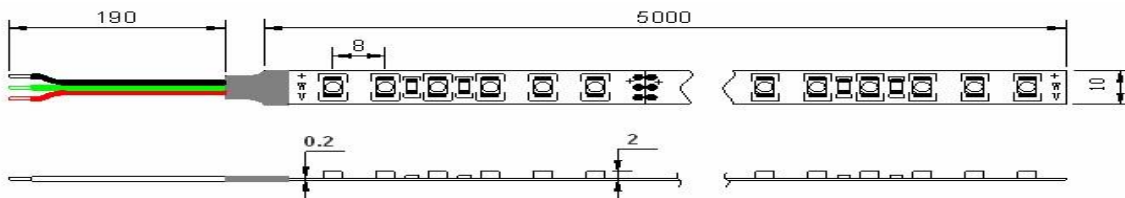


Unit: mm

Specifications

Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	CRI	Color and Luminous	(CT:K)
F3528X60TSA-H-12/24	SMD 3528 120/m (Super Bright)	DC12/24V	14.4W/m	120°	IP20/IP67	≥90	Warm White: 540lm-600lm Pure White: 600lm-700lm	3000-7000K
F3528X60TS-H-12/24			14.4W/m	120°	No	≥70	Warm White: 540lm-600lm Pure White: 600lm-700lm	3000-7000K
F3528X60T-H-12/24	SMD 3528 120/m (Normal Bright)	DC12/24V	9.6w/m	120°	IP20-IP68	≥70	Warm White: 310lm-360lm Pure White: 370lm-420lm	3000-7000K

Remark: X is for Waterproof type. A for Non-waterproof, B for IP54, C for IP67, D for IP68

Connection Instruction

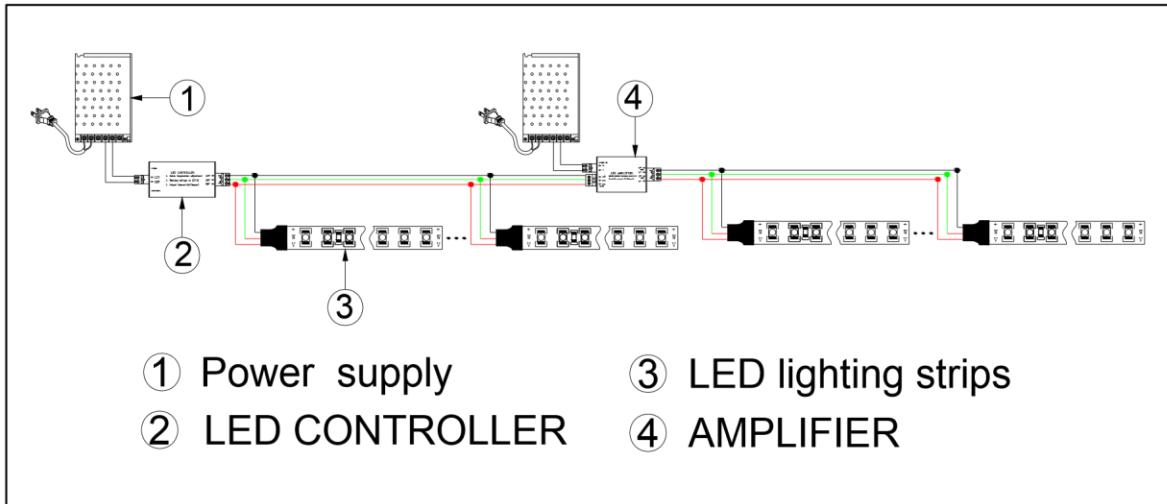

Notice:

Before application, please make sure the power supply is in accordance to the strips