


Specification Sheet for Super Bright SMD 3528 Constant Voltage Flexible Strips

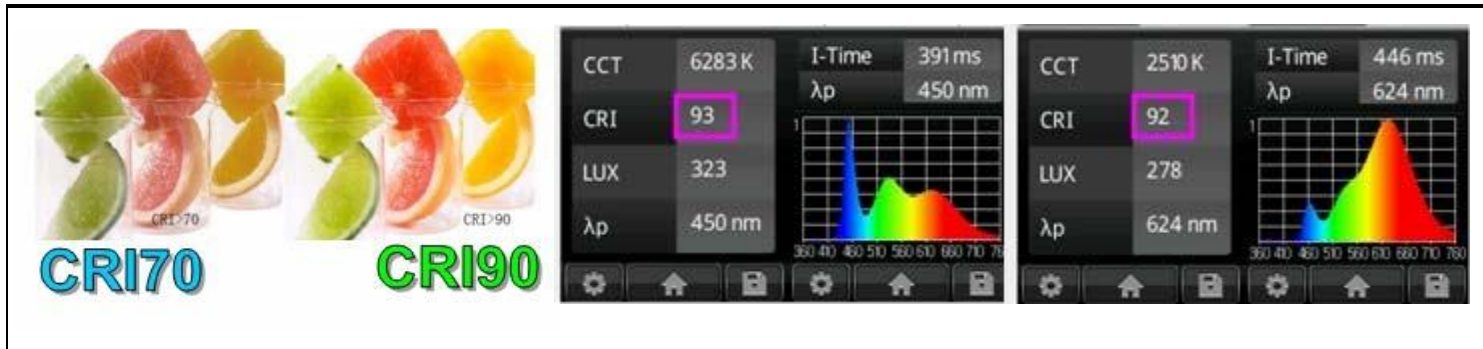


Applications:

- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting

Product features:


- ◆ Various angle 120degrees
- ◆ With self-adhesive tape on backside, 3LEDs a group for DC12V 6LEDs group for DC24V
- ◆ Made of high quality LED
- ◆ Work Voltage: DC12V/DC24V
- ◆ UL, CUL, CE, ROHS Approved

Dimension Drawings (120LED/m)

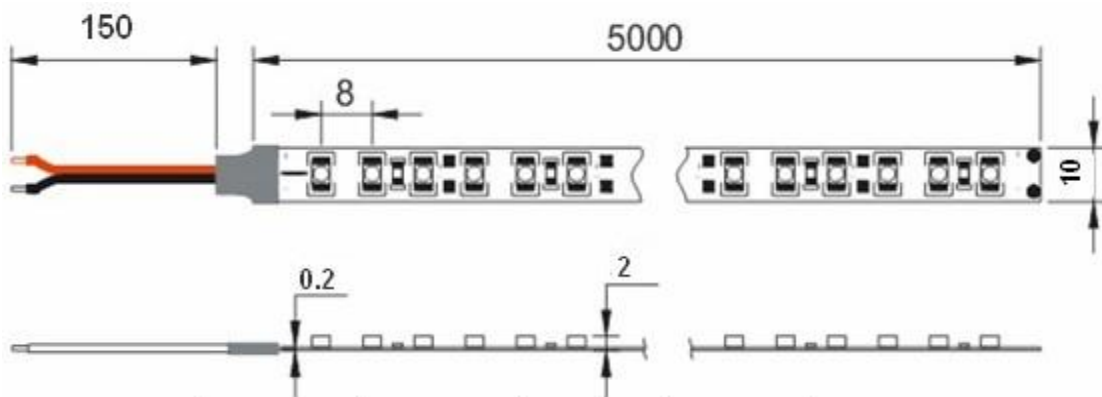


Unit: mm

Dimension Drawings (78LED/m)

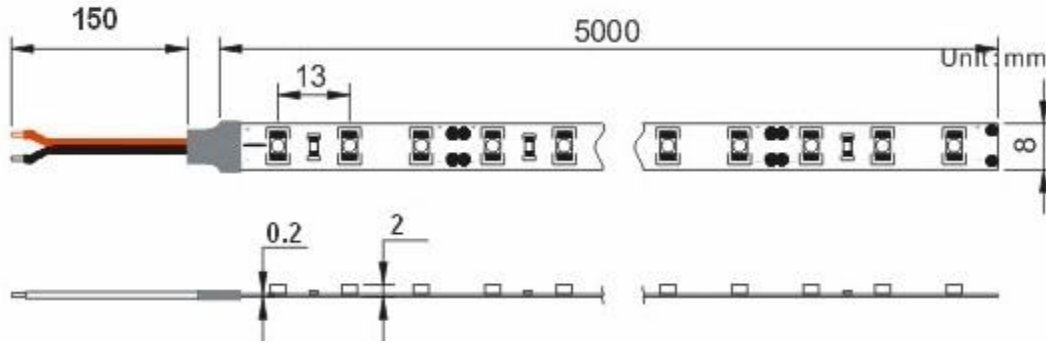

Dimension Drawings (60LED/m)

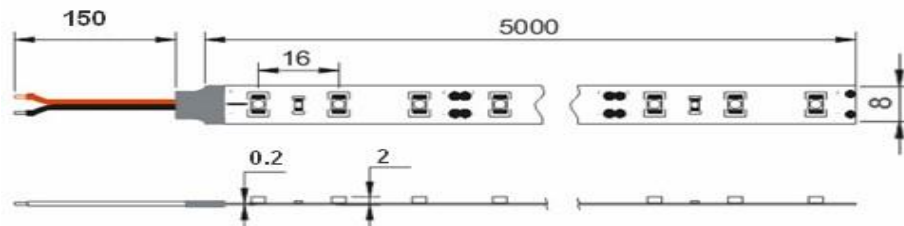


Unit: mm

Specifications

Model No.	LED Type	LED Qty (m)	Work Voltage	Power	PCB Size	Waterproof	Color	λ (Nm)/(CT:K)	Lumen (lm/m)
F3528X60S-P-12/24	SMD3528	120	DC24V/ DC12V	14.4W/m	10mm	IP20/IP67	□ Pure White	6000-7000K	1400-1440lm
F3528X60S-N-12/24							□ Nature White	4000-4500K	1200-1300lm
F3528X60S-W-12/24							□ Warm White	2200-3500K	1040-1080lm
F3528X39S-P-12/24	SMD3528	78	DC24V/ DC12V	9.4W/m	8mm	IP20/IP67	□ Pure White	6000-7000K	915-935lm
F3528X39S-N-12/24							□ Nature White	4000-4500K	800-900lm
F3528X39S-W-12/24							□ Warm White	2200-3500K	680-700lm
F3528X30S-P-12/24	SMD3528	60	DC24V/ DC12V	7.2W/m	8mm	IP20/IP67	□ Pure White	6000-7000K	700-720lm
F3528X30S-N-12/24							□ Nature White	4000-4500K	600-650lm
F3528X30S-W-12/24							□ Warm White	2200-3500K	520-540lm

Remark: X is for Waterproof type. A for Non-waterproof, C for IP67 Version

Connection drawings of Single Color

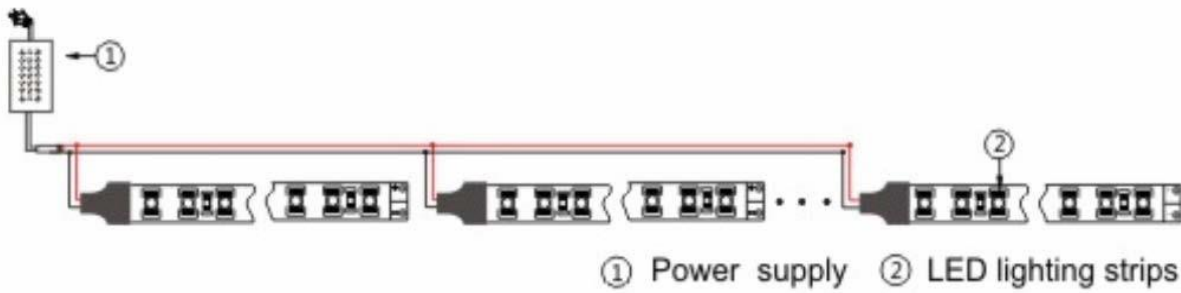

Notice:

Before Application, please ensure correct input of Positive & Negative Pole, otherwise, the strips will be damaged