

Specification Sheet for Super Bright Double-Line SMD 3528 LED Flexible Strips



Applications:


- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting



Product features:

- ◆ Various angle 120degrees
- ◆ With self-adhesive tape on backside, 6LEDs a group for DC24V
- ◆ Made of high quality LEDs
- ◆ Work Voltage: 24V
- ◆ UL, CUL, CE, ROHS Approved

Dimensions

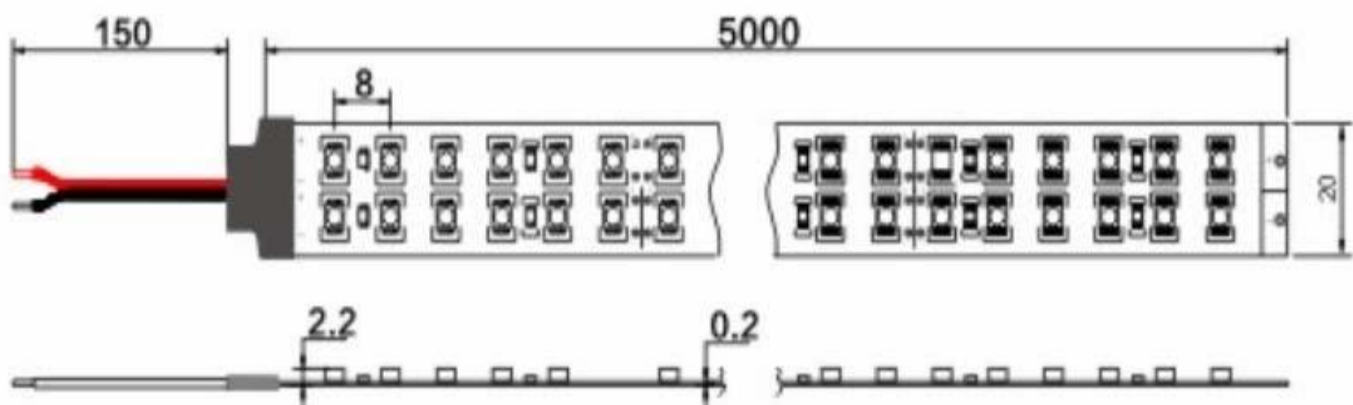


Unit: mm

Specifications

Model No.	Color	LED Qty	λ (Nm)/(CT:K)	Luminous Flux/m	PCB Size mm	Work Voltage	Power	Water proof
CRI $\geq$ 90 Version								
F3528X120SA-P-24	☐ Pure White	CRI90 SMD 3528 240/m	6000-7000K	2450-2550lm	20mm	DC24V	28.8W/m	IP20/IP67
F3528X120SA-N-24	☐ Nature White		4000-4500K	2400-2450lm				
F3528X120S-AW-24	☐ Warm White		2500-3500K	2350-2400lm				
Normal CRI Version								
F3528X120S-P-24	☐ Pure White	Super Bright SMD 3528 240/m	6000-7000K	2700-2880lm	20mm	DC24V	28.8W/m	IP20/IP67
F3528X120S-N-24	☐ Nature White		4000-4500K	2600-2700lm				
F3528X120S-W-24	☐ Warm White		2200-3500K	2300-2500lm				

Connection drawings (Single Color)

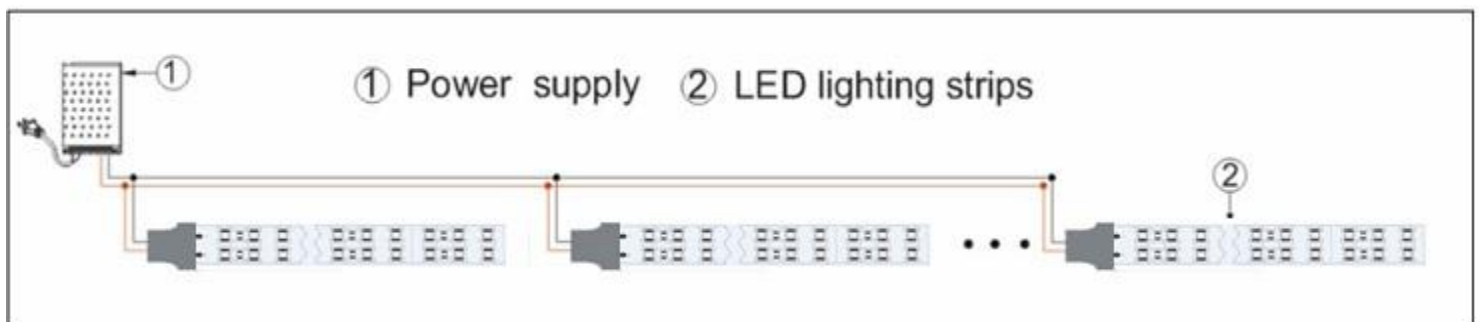

Notice:

Before application, please make sure the power supply is in accordance to the strips