


## Specification Sheet for 2LED Cutting DC24V LED Strips

Model: F5050X30-X-24, F5050X30SA-X-24

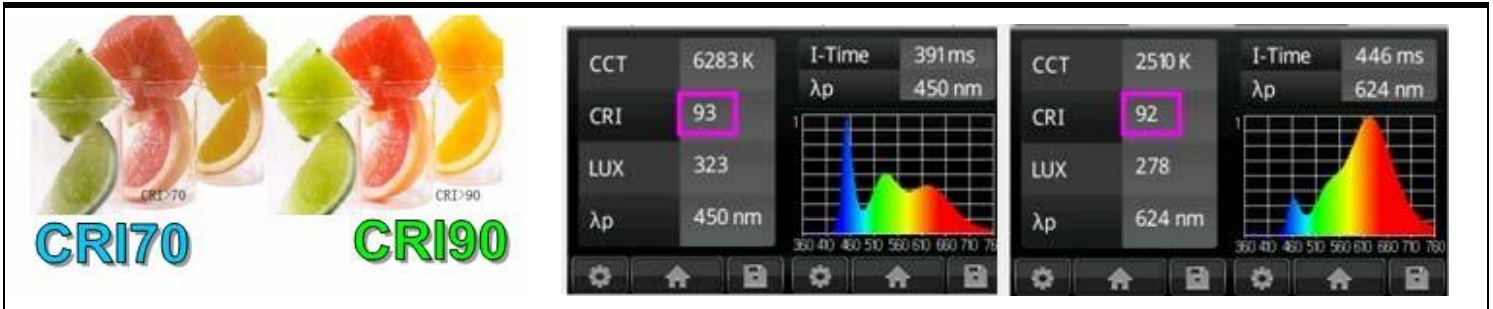

### Applications:

- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting


- ◆ Various angle 120degrees
- ◆ With adhesive tape on backside
- ◆ Made of high quality LEDs



### Product features:

- ◆ Work Voltage: DC24V
- ◆ Every Two LED can be cut
- ◆ UL, CUL, CE, ROHS Approved

### Dimensions Drawing

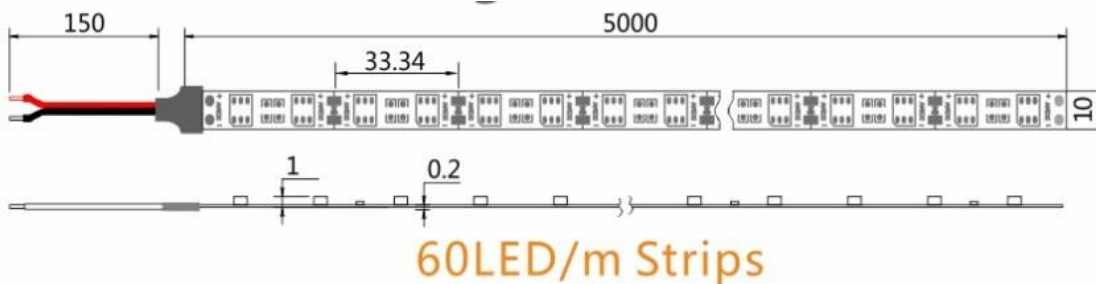

Unit:mm

Specifications

Model No.	Color	LED Qty	$\lambda$ (Nm)/(CT:K)	Luminous Flux (lm/m)	PCB Size (mm)	Work Voltage	Power	Water proof	Packing
-----------	-------	---------	-----------------------	----------------------	---------------	--------------	-------	-------------	---------

CRI ≥ 90 Version

F5050X30SA-P-24-2P	<input type="checkbox"/> Pure White	60/m	6000-7000K	1100-1200lm	10mm	DC24V	14.4W/m	IP20 (IP54, IP67, IP68)	5m/reel
F5050X30SA-N-24-2P	<input type="checkbox"/> Nature White		4000-4500K	1000-1100lm					
F5050X30SA-W-24-2P	<input type="checkbox"/> Warm White		2500-3500K	900-1000lm					

Model No.	Color	LED Qty	$\lambda$ (Nm)/(CT:K)	Luminous Flux (lm/m)	PCB Size (mm)	Work Voltage	Power	Water proof	Packing
-----------	-------	---------	-----------------------	----------------------	---------------	--------------	-------	-------------	---------

Around CRI70 Version

F5050X30-P-24-2P	<input type="checkbox"/> Pure White	60/m	6000-7000K	1100-1200lm	10mm	DC24V	14.4W/m	IP20 (IP54, IP67, IP68 Available)	5m/reel
F5050X30-N-24-2P	<input type="checkbox"/> Nature White		4000-4500K	1000-1100lm					
F5050X30-W-24-2P	<input type="checkbox"/> Warm White		2200-3500K	900-1000lm					
F5050X30-R-24-2P	<input checked="" type="checkbox"/> Red		620-630	430-450					
F5050X30-Y-24-2P	<input checked="" type="checkbox"/> Yellow		585-595	430-450					
F5050X30-B-24-2P	<input checked="" type="checkbox"/> Blue		455-470	300-320					
F5050X30-G-24-2P	<input checked="" type="checkbox"/> Green		510-525	840-860					

Remark: X is for Waterproof type. A for Non-waterproof, B for IP54 (with epoxy glue), S for IP54 (with silicone glue), C for IP67,

Connection drawings (Single Color)

