
Accent Design Concepts



ORDER MATRIX Example: A8R-VA

A	В	С	D	<u>E</u>	
Α	Series				
A8R-VA	8" Architectural Vertical Remodel Housing				
В	Input Voltage				
277 U	120V 277V 120-277	V			
С	Lamp				
P30 P38 A19	PAR30 PAR38 A19				
A21 A23	A21 A23				
D	Wattage				
L18	18W				
L24	24W				
L12 L17	12W 17W				
L20	20W				
E	Color Te	mperature	e		
28K	2800K				
35K 50K 65K	3500K 5000K 6500K				

8" Architectural Vertical Remodel Housing

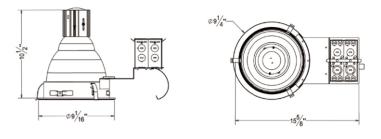

Mounting

- > Constructed from 16-gauge steel, die-formed construction for max heat dissipation and rust
- Precision tooled springs secure trim to mounting frame for effortless and tool-less installation
- > Fully assembled for ease of installation
- Non-IC housing require a minimum clearance of 3" around from thermal insulation and 1/2" from combustible material from above the fixture

Junction Box

- > Pre-wired junction box provided with 1/2" and 3/4" knockouts, romex knockouts with pry-out slots and strain clamps
- > Provided with removable access plates
- > All leads are #18AWG wire, the ground wire connected to the bottom and guick connectors are supplied on all leads
- > Through branch circuit wiring (4 in, 4 out)

Socket Cup

- > Adjusts vertically for optimum light performance
- > Die-cast fin construction for heat dissipation
- > Unitized optics guarantees proper trim to housing installation
- > Tool-less installation adjustability from either outside the housing or inside the housing

Reflector

- ➤ High quality reflector with 1.2mm thickness available
- > Optional painted white flange is available

Thermal Protector

- Meet ETL requirements
- > Standard thermal protection device guards against improper installation, over lamping and misuse of insulation material
- > External thermal device located on the junction box wrap

Socket

> E26 medium base

Lamp

- > LED PAR30 18W max.
- ➤ LED PAR38 24W max.
- > LED A19 12W max.
- > LED A21 17W max.
- > LED A23 20W max.
- ➤ CRI>80% ➤ PF>0.9
- ➤ Color Temperature: 2800K-6500K

Listing

> ETL listed for damp location W/Feed through



RV8002 8 inch Vertical Reflector Self Flanged/White Ring



RC802 8 inch Vertical Reflector with Regressed Lens Self Flanged/White Ring



RC803 8 inch Vertical Baffle with Regressed Lens Self Flanged/White Ring



RC808 8 inch Vertical Cross Blade White Ring



RV812 8 inch Vertical Reflector with Baffle White Ring



RC188 8 inch Vertical Reflector with Drop Glass Self Flanged